

LOC I-SQK <u>108.35</u>	APP CRS 185°	Rwy Ldg TDZE Apt Elev	6503 866 866
-----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 18
METTEL FLD (CEV)


ADF required.

NA Circling NA to Rwy's 4 and 22. For inop MALSR, increase S-LOC 18 Cats C/D visibility to 1 1/8 mile. When local altimeter setting not received, use James M Cox Dayton Intl altimeter setting and increase ILS DA to 1237 feet and visibility all Cats to 3/8 mile, increase all MDA 140 feet and LOC Cats C/D visibility to 1 1/8 mile, and Circling Cat B visibility to 1 mile and Cat C to 2 3/4 miles and Cat D to 3 miles. When using James M Cox Dayton Intl altimeter setting: for inop MALSR, increase S-ILS 18 all Cats visibility to 1 mile and increase S-LOC 18 Cat A/B visibility to 1 mile and Cat C/D to 1 1/8 mile.

MALSR
A5

MISSED APPROACH:
Climb to 2800 then
left turn direct SQ LOM
and hold.


AWOS-3 118.325	COLUMBUS APP CON 134.45 352.05	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------




SHELBYVILLE
116.15 SHB 
Chan 108 (Y)

LOM/IAF
PNTHR
227 SQ :::. _

LOCALIZER 108.35
LSQK ∴

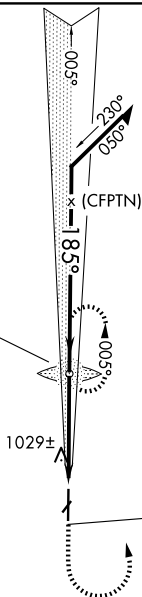

FAF to MAP 4.2 NM					
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

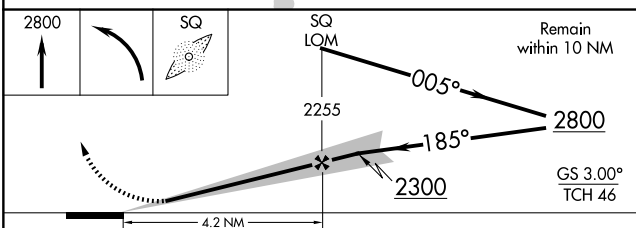

CATEGORY	A	B	C	D
S-ILS 18	1116-1½ 250 (300-½)			
S-LOC 18	1280-½	414 (500-½)	1280-¾	414 (500-¾)
CIRCLING	1440-1 574 (600-1)	1540-1 674 (700-1)	1620-2¼ 754 (800-2¼)	1620-2½ 754 (800-2½)