


WAAS CH 69630 W05A	APP CRS 050°	Rwy Ldg TDZE 3427 Apt Elev 3443
--	------------------------	---

RNAV (GPS) RWY 5

SHELBY (SBX)

RNP APCH - GPS.	MISSED APPROACH: Climb to 9000 direct YENUP and hold, continue climb-in-hold to 9000.
Baro-VNAV and VDP NA when using Cut Bank altimeter setting. For uncompensated Baro-VNAV systems, UNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Cut Bank altimeter setting.	

AWOS-3PT 128.325	SALT LAKE CITY CENTER 133.4 285.4	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

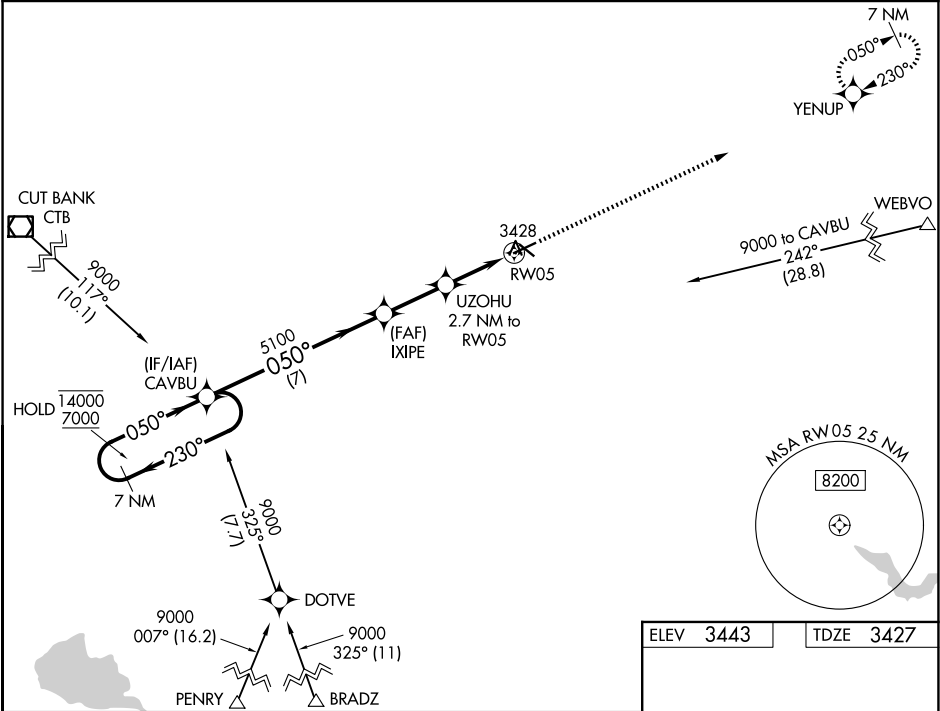

7 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).		9000	YENUP
14000 7000		CAVBU		IXIPE	
GP 3.00° TCH 45		5100		UZOHU 2.7 NM to RW05	
230° 050°		050°		1.1 NM to RW05	
7 NM		2.4 NM		1.6 NM	
A		B		C	
LPV DA		3733-1		306 (300-1)	
LNAV/VNAV DA		3783-1		356 (400-1)	
LNAV MDA		3800-1		373 (400-1)	
CIRCLING		4020-1 577 (600-1)		4080-1 637 (700-1)	
		4100-1 657 (700-1 1/4)		4220-2 1/2 777 (800-2 1/2)	