

WAAS CH 93620 W12A	APP CRS 123°	Rwy Ldg TDZE 2294 Apt Elev 2296
--	------------------------	---

RNAV (GPS) RWY 12


WOKAL FLD/GLASGOW-VALLEY COUNTY (GGW)

RNP APCH

For uncompensated Baro-VNAV systems, LNAV-VNAV NA below -14°C or above 54°C. When local altimeter setting not received, use Wolf Point altimeter setting and increase LPV DA to 2685 feet and visibility all Cats ½ SM; Increase LNAV/VNAV DA to 2728 feet and visibility all Cats ½ SM; increase all MDAs 160 feet and LNAV Cats C/D and Circling Cat D visibility ½ SM, Circling Cat C ¼ SM. Baro-VNAV and VDP NA when using Wolf Point altimeter setting.

MISSED APPROACH: Climb to 6000 direct EZCUP and on track 077° to NEGAE and hold.

ASOS 135.175	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

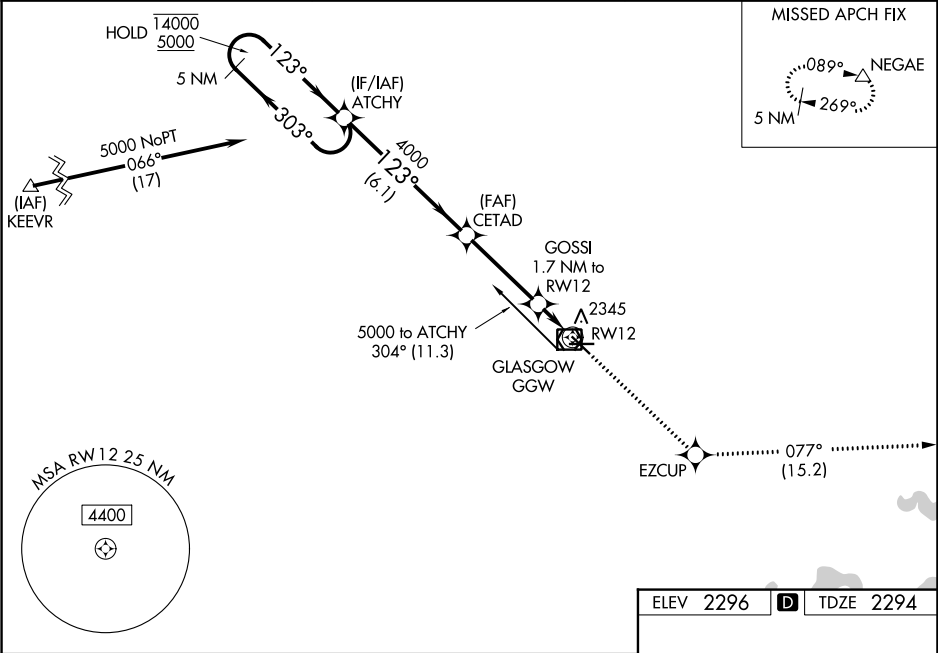

5 NM Holding Pattern		ATCHY		6000 ↑		EZCUP ✦		tr 077° △		NEGAE △	
14000 ← 303° 5000 → 123°		123°		CETAD 4000		GOSSI 1.7 NM to RW12		*0.9 NM to RW12		*LNAV only	
GP 3.00° TCH 40		4000		*2860		RW12		RW12		RW12	
		6.1 NM		3.5 NM		0.8		0.9			
CATEGORY	A	B	C	D							
LPV DA	2544-7/8 250 (300-7/8)										
LNAV/ VNAV DA	2587-1 293 (300-1)										
LNAV MDA	2600-1	306 (400-1)	2600-7/8		306 (400-7/8)						
CIRCLING	2780-1	484 (500-1)	2780-1½ 484 (500-1½)		2900-2 604 (700-2)						

