

LOC I-FZU 111.1	APP CRS 259°	Rwy Ldg TDZE Apt Elev	7005 462 463
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 26L
SPIRIT OF ST LOUIS (SUS)


⚠ When local alimeter setting not received, use St Louis Lambert Intl alimeter setting:
⚠ increase S-ILS 26L DA to 705 feet; increase all MDAs 60 feet and S-LOC 26L visibility Cat C and D ½ SM and Circling visibility C ¼ SM. For inop ALS, increase S-LOC 26L Cats C and D visibility to 1½ SM. For inop ALS when using St Louis Lambert Intl alimeter setting, increase S-LOC 26L Cats C and D visibility to 2 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl alimeter setting).

MALSR



MISSED APPROACH: Climb to 2400 then right turn direct FTZ VORTAC and hold.

ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER ★ 124.75 (CTAF) 257.2	GND CON 121.7	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

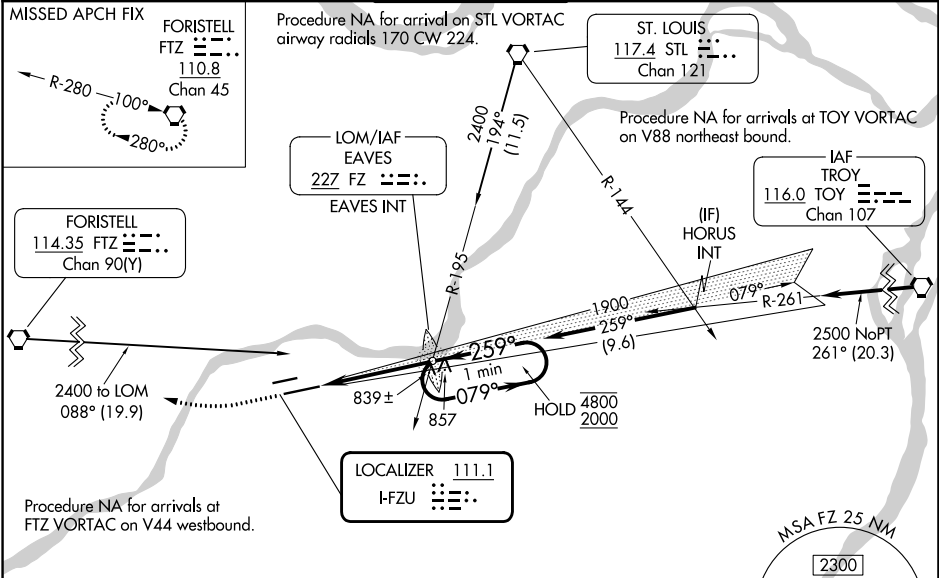


ELEV 463	D	TDZE 462
----------	---	----------

HIRL Rwy 8R-26L
HIRL Rwy 8L-26R

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

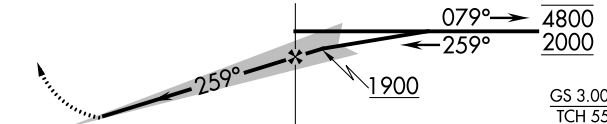2400 ↑		FTZ 	FZ LOM EAVES INT 1871	One Minute Holding Pattern	079° → 4800 ← 259° 2000	1900	GS 3.00° TCH 55
							
CATEGORY	A		B	C	D		
S-ILS 26L *	662/24 200 (200-½)						
S-LOC 26L	1140/24 678 (700-½)			1140-1½ 678 (700-½)			
CIRCLING	1140-1 677 (700-1)			1180-2 717 (800-2)		1360-3 897 (900-3)	

NC-3, 03 SEP 2026 to 01 OCT 2026

NC-3, 03 SEP 2026 to 01 OCT 2026