
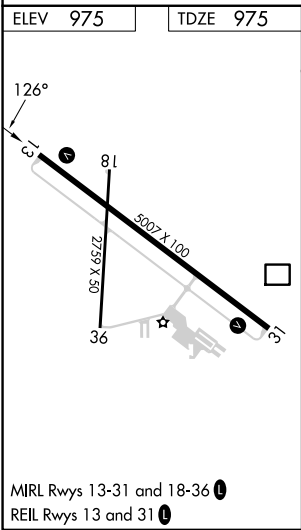


WAAS CH 50236 W13A	APP CRS 126°	Rwy Ldg TDZE 975 Apt Elev 975
--	------------------------	---

RNAV (GPS) RWY 13

MARSHALLTOWN MUNI (MIW)

RNP APCH - GPS.			MISSED APPROACH: Climb to 2600 direct VUNDY and hold.
Baro-VNAV and VDP NA when using GGI altimeter setting. Circling Rwy 18, 36 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use GGI altimeter setting and increase LPV DA to 1289 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1289 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM.			
ASOS 128.325	DES MOINES APP CON ★ 120.9	CLNC DEL 120.9	UNICOM 122.8 (CTAF) 0

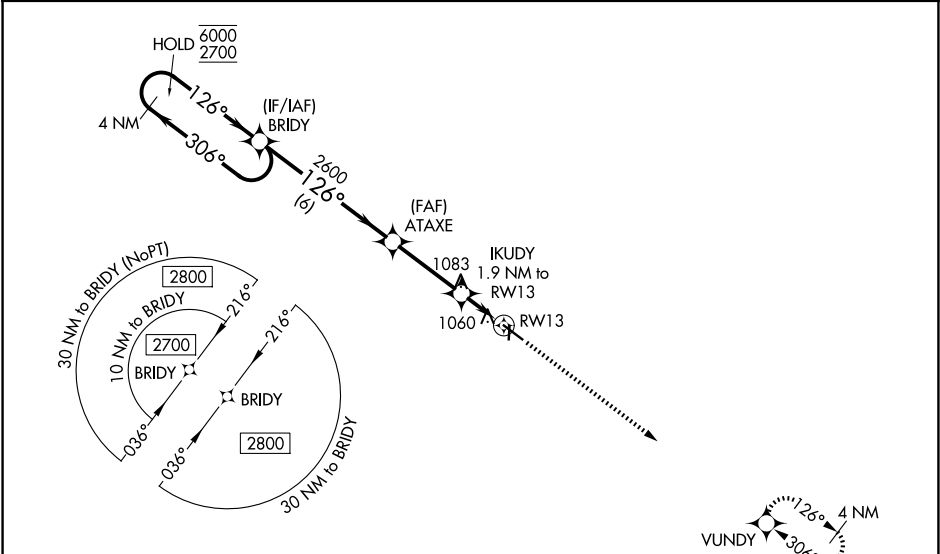

4 NM Holding Pattern		BRIDY	ATAXE	IKUDY 1.9 NM to RW13	1 NM to RW13	RW13
6000 2700		306°	126°	126°	1620	
GP 3.00° TCH 42		6 NM	3.1 NM	1 NM	1 NM	
CATEGORY	A	B	C	D		
LPV DA	1225-¾		250 (300-¾)			
LNAV/VNAV DA	1225-¾		250 (300-¾)			
LNAV MDA	1320-1		345 (400-1)			
CIRCLING	1400-1 425 (500-1)	1440-1 465 (500-1)	1460-1½ 485 (500-1½)	1840-2¾ 865 (900-2¾)		