

WAAS CH 82231 W11A	APP CRS 110°	Rwy Ldg 4099 TDZE 482 Apt Elev 482
--	------------------------	--

RNAV (GPS) RWY 11

OLNEY-NOBLE (OLY)

RNP APCH.

▼


Baro-VNAV NA when using Evansville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use

▲

Evansville altimeter setting and increase all DAs 126 feet, MDAs 140 feet; increase LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D ¾ SM and Circling Cat C ¼ SM and Cat D ½ SM.

MISSED APPROACH:
Climb to 1500 then
climbing right turn to
3000 direct FOYWU
and hold.

AWOS-3 119.275	KANSAS CITY CENTER 124.3 269.15	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

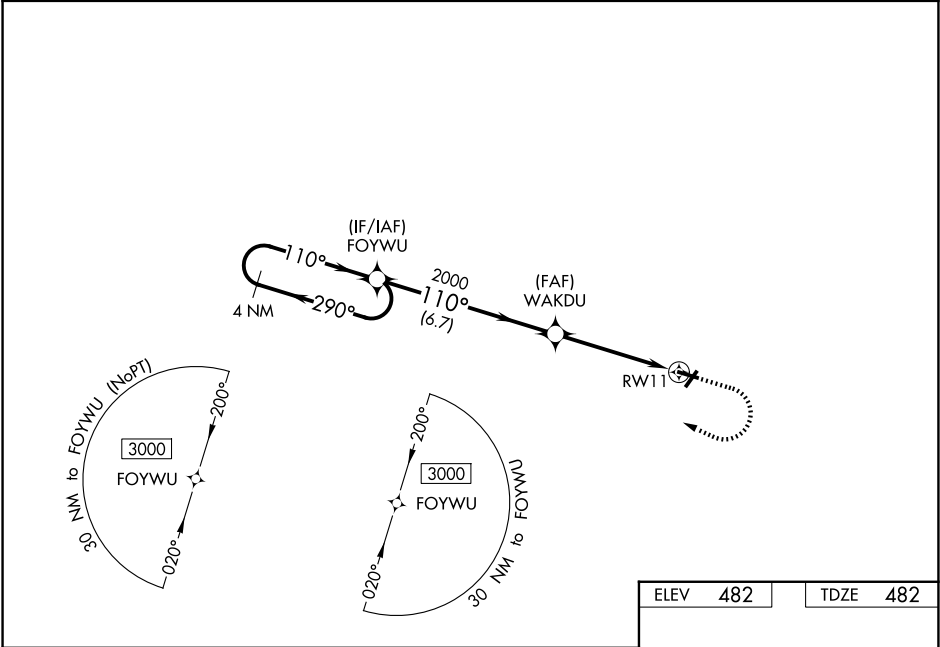

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22).

4 NM Holding Pattern

FOYWU

WAKDU

RW11

GP 3.00° TCH 40

6.7 NM

4.6 NM

CATEGORY	A	B	C	D
LPV DA	732-1 250 (300-1)			
LNAV/VNAV DA	962-1½ 480 (500-1½)			
LNAV MDA	920-1 438 (500-1)	920-1¼ 438 (500-1¼)		
CIRCLING	960-1 478 (500-1)	960-1½ 478 (500-1½)	1180-2¼ 698 (700-2¼)	

ELEV 482 TDZE 482

REIL Rwy 4 and 11 0

MIRL Rwy 4-22 and 11-29 0