

WAAS CH 90409 W12A	APP CRS 120°	Rwy Ldg TDZE Apt Elev	5000 1274 1274
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

DENISON MUNI (DNS)


RNP APCH-GPS.

⚠


Circling NA to Rwy 18 and 36. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Carroll altimeter setting. When local altimeter setting not received, use Carroll altimeter setting; increase LPV DA 1596 feet, LNAV/VNAV DA to 1626 feet; increase all MDAs 80 feet and visibility LNAV Cat C ½ SM and Circling Cat C ¾ SM.

MISSED APPROACH:
Climb to 3900 direct
OTLAZ and hold.

AWOS-3 119.95	MINNEAPOLIS CENTER 119.6 290.4	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

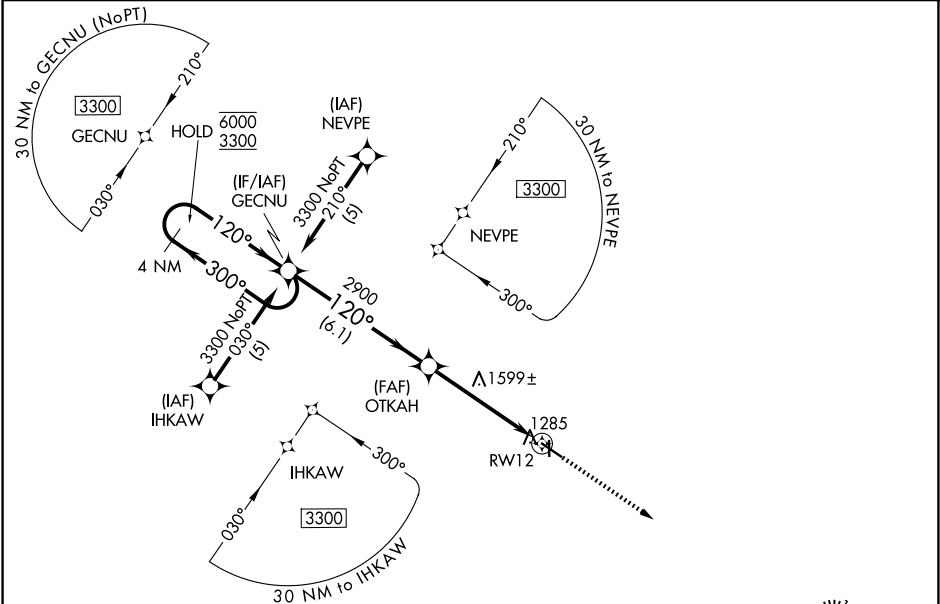

ELEV 1274	TDZE 1274
-----------	-----------



MIRL Rwy 12-30 0
REIL Rwy 12 and 30 0

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28).

3900 OTLAZ

*LNAV only

6000 ← 300°

3300 → 120°

GP 3.00° TCH 40

OTKAH 2900

2900

6.1 NM

3.1 NM

1.8 NM

RWY 12

CATEGORY	A	B	C	D
LPV DA	1524-1	250 (300-1)		NA
LNAV/VNAV DA	1554-1	280 (300-1)		NA
LNAV MDA	1860-1	586 (600-1)	1860-1¾ 586 (600-1¾)	NA
CIRCLING	1860-1 586 (600-1)	1880-1 606 (700-1)	2100-2½ 826 (900-2½)	NA

NC-3, 03 SEP 2026 to 01 OCT 2026

NC-3, 03 SEP 2026 to 01 OCT 2026