

WAAS CH 82104 W02A	APP CRS 019°	Rwy Ldg 6506 TDZE 300 Apt Elev 303
--	------------------------	---

RNAV (GPS) RWY 2
HEART OF GEORGIA RGNL (E2M)


⚠ Baro-VNAV NA when using Dublin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Dublin altimeter setting and increase all DA 52 feet and all MDA 60 feet; increase LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C visibility ¼ miles. DME/DME RNP-0.3 NA. VDP NA with Dublin altimeter setting.

MALS R

AS

MISSED APPROACH:
Climb to 2100 direct UCALA and hold.

ATIS 119.425	JACKSONVILLE CENTER 127.575 269.025	HEART OF GEORGIA TOWER ★ 124.55 (CTAF) 0	GND CON 121.175	UNICOM 122.95
------------------------	---	--	---------------------------	-------------------------

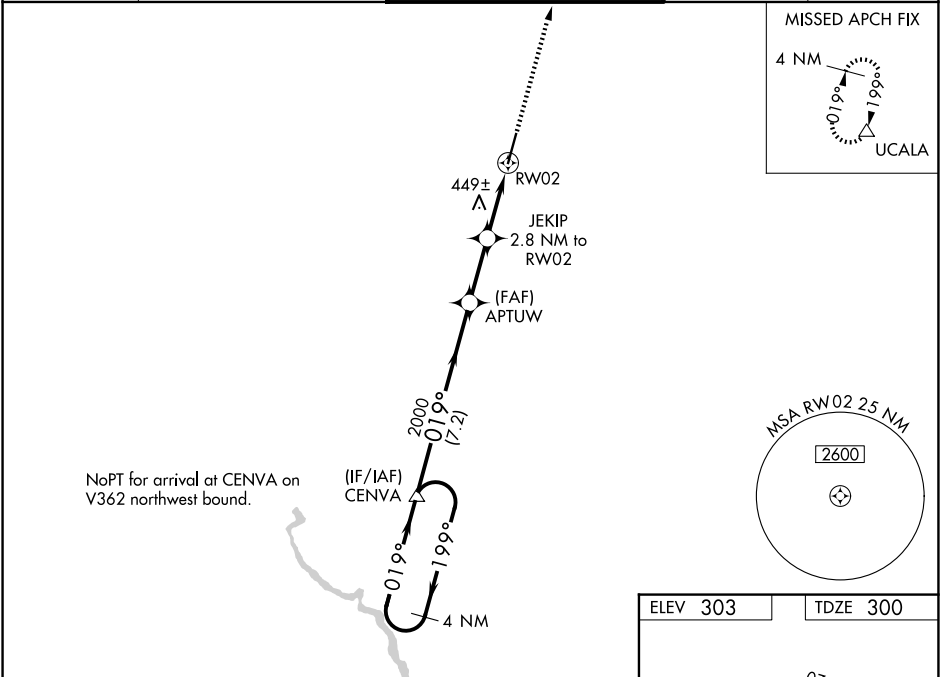

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).					2100	UCALA
4 NM Holding Pattern					APTUW	JEKIP
GP 3.00° TCH 49					2000	2.8 NM to RW02
2000 ← 199° → 019° → 2000					*1220	*1.1 NM to RW02
7.2 NM					2.4 NM	1.7 NM
1.1					RW02	
CATEGORY	A	B	C	D		
LPV DA	500-1/2		200 (200-1/2)			
LNAV/VNAV DA	595-1/2		295 (300-1/2)			
LNAV MDA	700-1/2 400 (400-1/2)		700-3/4 400 (400-3/4)			
CIRCLING	760-1 457 (500-1)	820-1 517 (600-1)	900-1/2 597 (600-1/2)	900-2 597 (600-2)		

