

RNAV (GPS) RWY 32

WAAS CH 91281 W32A	APCH CRS 323°	Rwy Idg 4529 TDZE 68 Arpt Elev 74
---------------------------------	------------------	--

(USA)

DAVISON AAF (FORT BELVOIR) (KDAA)

RNP APCH - GPS	
----------------	--

T * When ALS inop. increase RVR to 45. vis to 7/8 mile.

**** When ALS inop, increase vis to 1 3/8 miles.**

*** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1 3/8 miles.

A4 -

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct UDCY and hold.

ATIS 128.175	POTOMAC APP CON 118.95 319.1	TOWER★ 124.275 (CTAF) 0 229.4	GND CON 121.9 351.8
-----------------	---------------------------------	----------------------------------	------------------------




***** When ALS inop, increase vis to 1 1/2 miles.

***** When ALS inop,
increase CAT AB RVR to
55, vis to 1 mile; CAT
CD vis to 1 5/8 miles.

For uncompensated
Baro-VNAV systems,
LNAV/VNAV NA below
-15°C or above 54°C.

If local altimeter setting
not received, use Ronald
Reagan Washington
National altimeter setting.


Baro-VNAV NA when using
Ronald Reagan Washington
National altimeter setting.

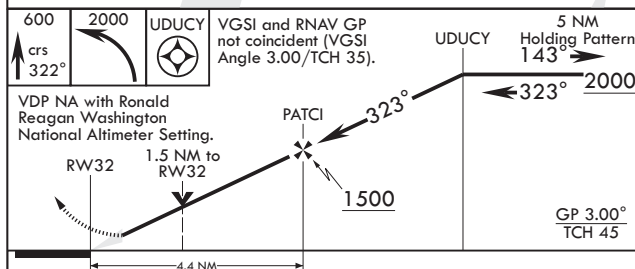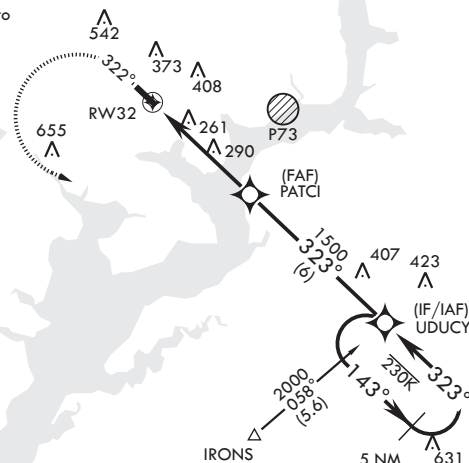

CATEGORY	A	B	C	D
LPV DA*	337/40	269	(300-¾)	
LNAV/VNAV DA**	556/60	488	(500-1½)	
LNAV MDA***	580/40	512 (600-¾)	580-1¼	512 (600-1¼)
CIRCLING	680-1 606 (700-1)	720-1 646 (700-1)	760-2 686 (700-2)	1000-3 926 (1000-3)
RONALD REAGAN WASHINGTON NATIONAL ALTIMETER MINIMUMS				
LPV DA	370/40	302	(300-¾)	
LNAV/VNAV DA****	589-1¼	521	(600-1¼)	
LNAV MDA*****	620/40	552 (600-¾)	620-1½	552 (600-1½)
CIRCLING	720-1 646 (700-1)	760-1 686 (700-1)	800-2 726 (800-2)	1040-3 966 (1000-3)

ELEV 74		TDZE 68
---------	--	---------

TDZE 68



FORT BELVOIR, VIRGINIA

38°43'N - 77°11'W

DAVISON AAF (FORT BELVOIR) (KDAA)

Amdt 5 16APR26

RNAV (GPS) RWY 32