

WAAS CH 53711 W26A	APP CRS 256°	Rwy Ldg 4997 TDZE 24 Apt Elev 26
--	------------------------	---

RNAV (GPS) RWY 26

PITT-GREENVILLE (PGV)

RNP APCH - GPS.



▼

Baro-VNAV NA when using Washington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 26 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received use Washington altimeter setting and increase LPV DA to 376 feet, visibility all Cats ¼ SM; increase LNAV/VNAV DA to 505, visibility all Cats ¼ SM; increase all MDAs 60 feet, LNAV visibility Cat C and D and Circling Cat D ¼ SM.

MISSED APPROACH:

Climb to 3000 direct EXINE and via 346° track to FESBA and via 076° track to KENIR and hold.

AWOS-3PT 128.425	WASHINGTON CENTER 123.85 279.65	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

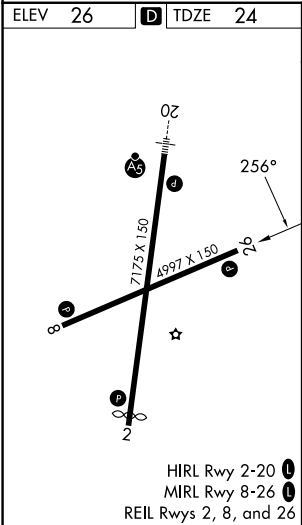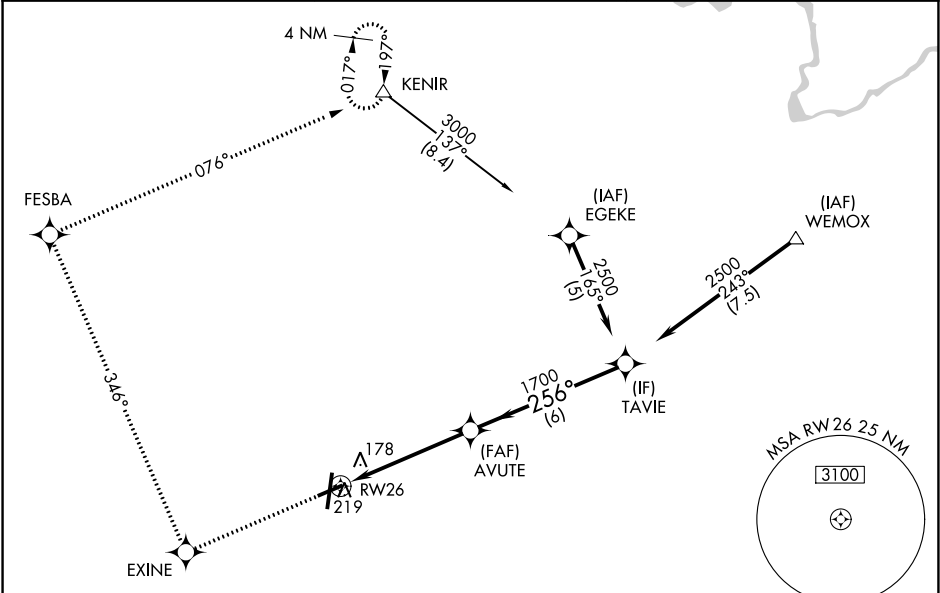

3000	EXINE	tr 346°	FESBA	tr 076°	KENIR	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40).	TAVIE	Procedure Turn NA
							2500	GP 3.00° TCH 45
							1700	
							5.1 NM	6 NM
CATEGORY	A	B	C	D				
LPV DA		335-7/8	311 (400-7/8)					
LNAV/VNAV DA		464-1 1/4	440 (500-1 1/4)					
LNAV MDA	520-1	496 (500-1)	520-1 3/8	496 (500-1 3/8)				
CIRCLING	600-1 574 (600-1)	620-1 594 (600-1)	700-2 674 (700-2)	800-2 1/2 774 (800-2 1/2)				