WAAS CH 56219 W35A	APP CRS 350°	Rwy Ldg 6016	TDZE 78	Apt Elev 82

RNAV (GPS) RWY 35

SUGAR LAND RGNL (SGR)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). Baro-VNAV and VDP NA when using William P Hobby altimeter setting. When local altimeter setting not received, use William P Hobby altimeter setting: increase all DA 51 feet; increase all MDA 60 feet and increase LNAV-VNAV all Cats visibility to 1¾, LNAV Cat C/D visibility to 1⅞, and Circling Cat C visibility to 2, Cat D to 2¼. When VGSI inop, Circling Rwy 17 NA at night.

MISSED APPROACH: Climb to 2000 direct UPAQI and on track 019° to DREWZ and hold.

D-ATIS	HOUSTON APP CON	SUGAR LAND TOWER ★	GND CON	UNICOM
118.125	123.8 257.7	118.65 (CTAF) L	121.4	122.95

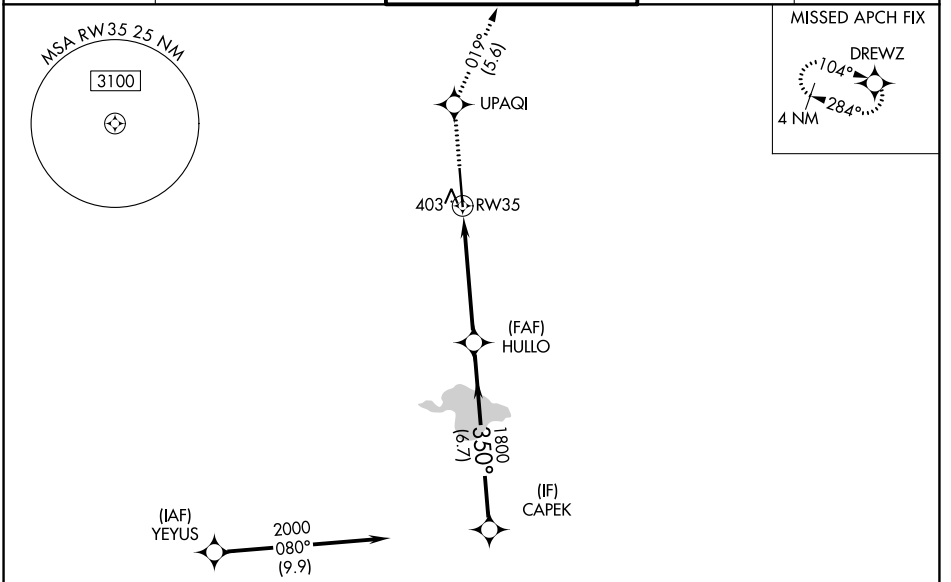

RADAR REQUIRED

ELEV 82 TDZE 78

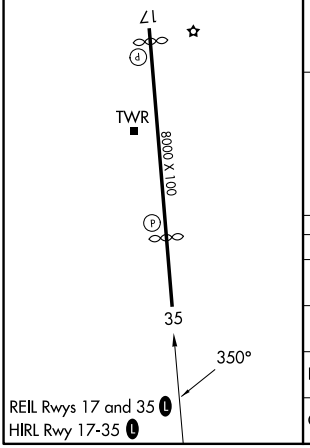

2000	UPAQI	tr 019°	DREWZ

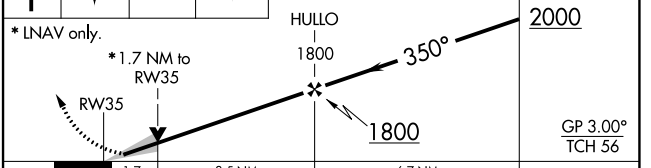

CATEGORY	A	B	C	D
LPV DA	278-¾ 200 (200-¾)			
LNAV/VNAV DA	567-1⅝ 489 (500-1⅝)			
LNAV MDA	660-1 582 (600-1)		660-1¾ 582 (600-1¾)	
CIRCLING	720-1 638 (700-1)		720-1¾ 638 (700-1¾)	720-2 638 (700-2)

SC-5, 03 SEP 2026 to 01 OCT 2026
SC-5, 03 SEP 2026 to 01 OCT 2026