

WAAS CH 86505 W06A	APP CRS 057°	Rwy Ldg 5000 TDZE 303 Apt Elev 303
--	------------------------	---

RNAV (GPS) RWY 6



WOODWARD FLD (CDN)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using CAE altimeter setting. When local altimeter setting not received, use CAE altimeter setting: increase LPV DA to 673 feet; increase LNAV/VNAV DA to 804 feet; increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cats C/D ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling Rwy 14, 32 NA at night.


MISSED APPROACH:
Climb to 3000 direct
IBAYE and hold.

AWOS-3PT 119.975	SHAW APP CON ★ 125.4 318.1	UNICOM 123.0 (CTAF) 0
----------------------------	--------------------------------------	---------------------------------

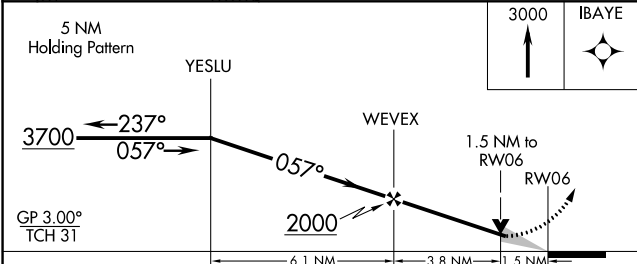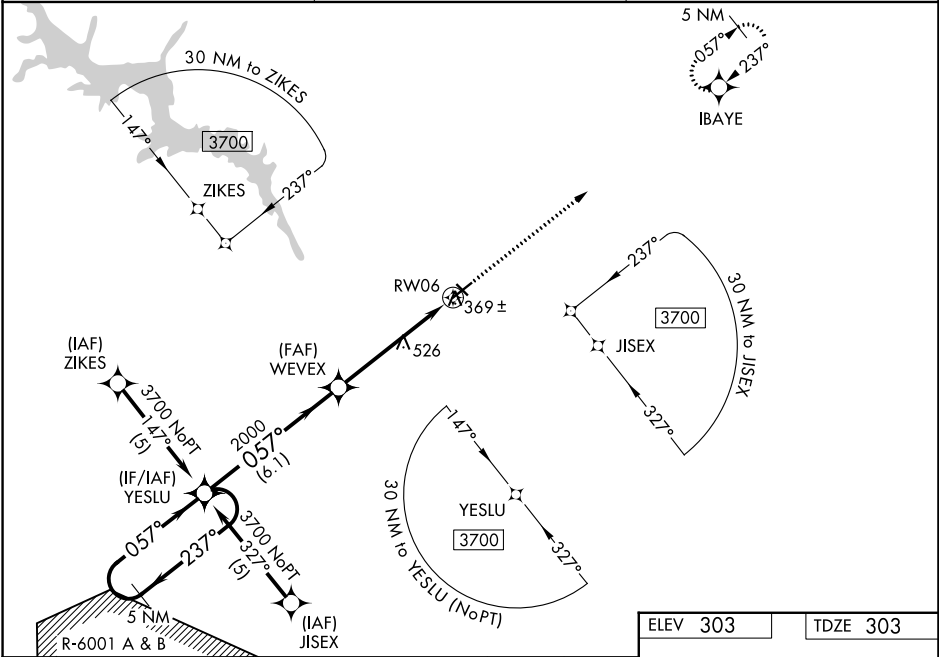

CATEGORY	A	B	C	D
LPV DA	583-1	280 (300-1)		
LNAV/VNAV DA	714-1½	411 (500-1½)		
LNAV MDA	780-1	477 (500-1)	780-1¾ 477 (500-1¾)	780-1½ 477 (500-1½)
CIRCLING	840-1	537 (600-1)	840-1½ 537 (600-1½)	900-2 597 (600-2)

ELEV 303	TDZE 303
----------	----------



MIRL Rwy 6-24 0
REIL Rws 6 and 24 0

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT 2026