


WAAS CH 87030 W13A	APP CRS 135°	Rwy Ldg TDZE Apt Elev	5000 1203 1204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

ARTHUR N NEU (CIN)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct COHGI and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Audubon altimeter setting. When local altimeter setting not received, use Audubon altimeter setting: increase LPV DA to 1515 feet; increase LNAV/VNAV DA to 1669 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cat C ¼ SM.	

AWOS-3 118.025	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

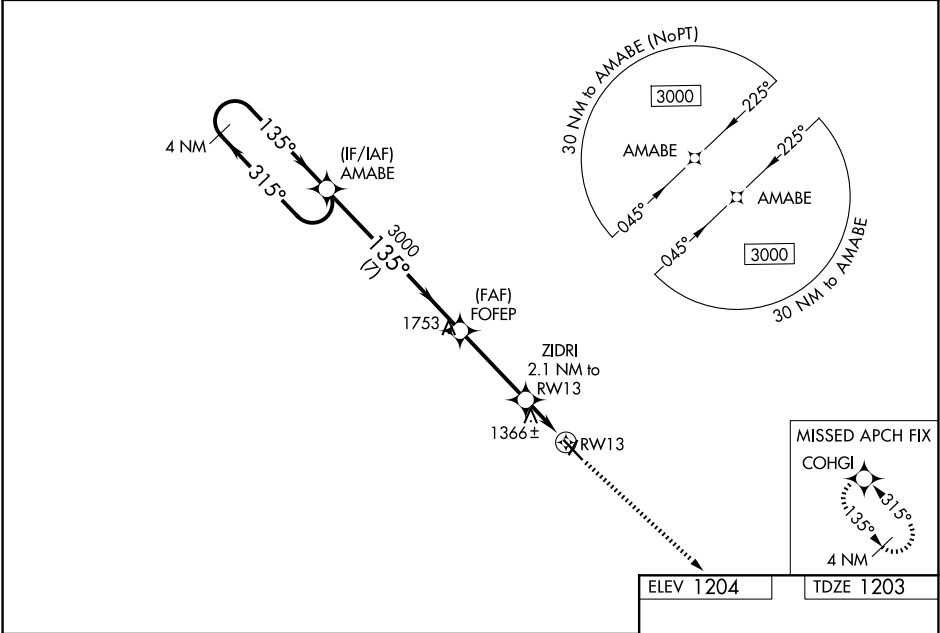

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).				
4 NM Holding Pattern GP 3.00° TCH 40 3000 135° 315° 3000 135° 315° 3000 7 NM 3.4 NM 0.9 1.2 NM				
CATEGORY	A	B	C	D
LPV DA	1453-1	250 (300-1)		NA
LNAV/VNAV DA	1607-1⅜	404 (500-1⅜)		NA
LNAV MDA	1620-1	417 (500-1)	1620-1⅜ 417 (500-1⅜)	NA
CIRCLING	1740-1	536 (600-1)	1980-2¼ 776 (800-2¼)	NA

