
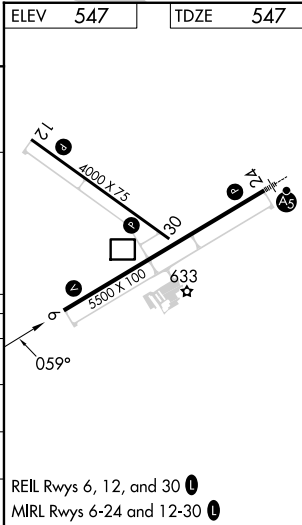
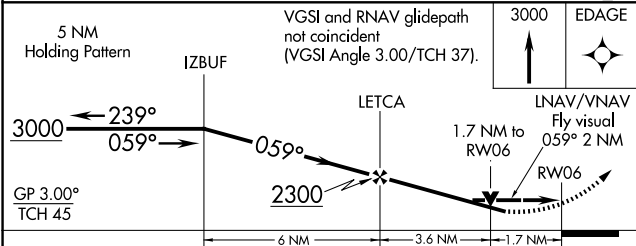


WAAS CH 53701 W06A	APP CRS 059°	Rwy Ldg TDZE Apt Elev	5500 547 547
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6
MUSCATINE MUNI (MUT)

RNP APCH - GPS.	⚠ Rwy 6 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use IOW altimeter setting: increase LPV DA to 1147 feet; increase LNAV/VNAV DA to 1303 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using IOW altimeter setting.	MISSED APPROACH: Climb to 3000 direct EDAGE and hold.
-----------------	--	--

AWOS-3P 120.625	QUAD CITY APP CON ★ 133.275 257.8	CLNC DEL 119.125	UNICOM 122.7 (CTAF) 0
---------------------------	---	----------------------------	---------------------------------

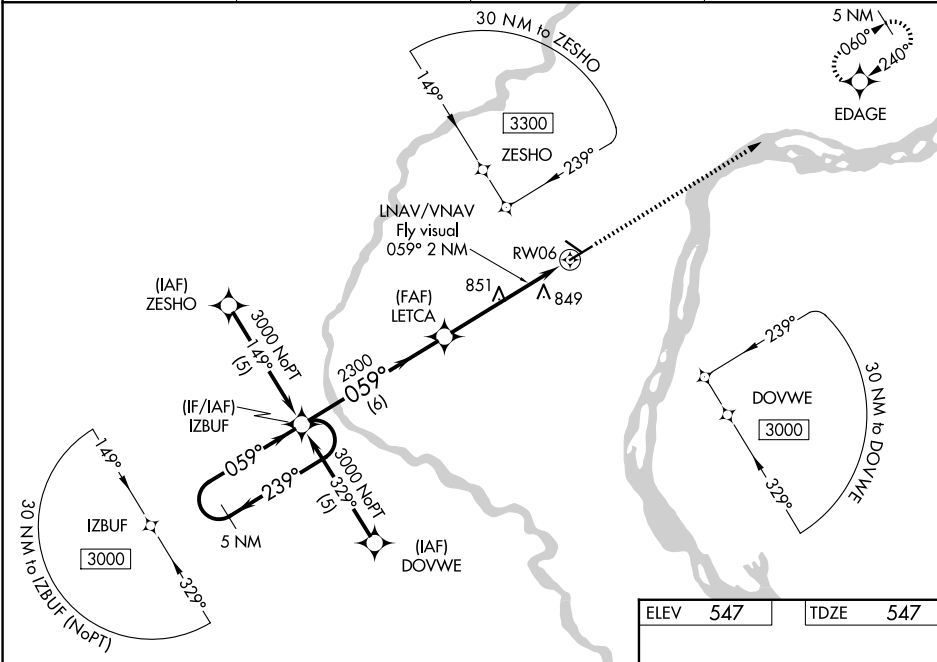

CATEGORY	A	B	C	D
LPV DA	1076-2 529 (600-2)			
LNAV/VNAV DA	1232-2 685 (700-2)			1232-2¼ 685 (700-2¼)
LNAV MDA	1120-1 573 (600-1)	1120-1½ 573 (600-1½)	1120-1¾ 573 (600-1¾)	
CIRCLING	1120-2½ 573 (600-2½)	1200-2½ 653 (700-2½)	1500-3 953 (1000-3)	