RNAV (GPS) RWY 36

SMITH FLD (SLG)

WAAS	APP CRS	Rwy Ldg	5001
CH 63105	001°	TDZE	1181
W36A		Apt Elev	1191

RNP APCH - GPS.

When local altimeter setting not received, use XNA altimeter setting: increase LPV DA to 1469 feet; increase LNAV/VNAV DA to 1587 feet; increase all MDAs 40 feet. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 36 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using XNA altimeter setting.

MISSED APPROACH: Climb to 3100 direct LALIC and hold.

AWOS-3PT	RAZORBACK APP CON★	UNICOM
118.375	121.0 244.575	122.8 (CTAF) L

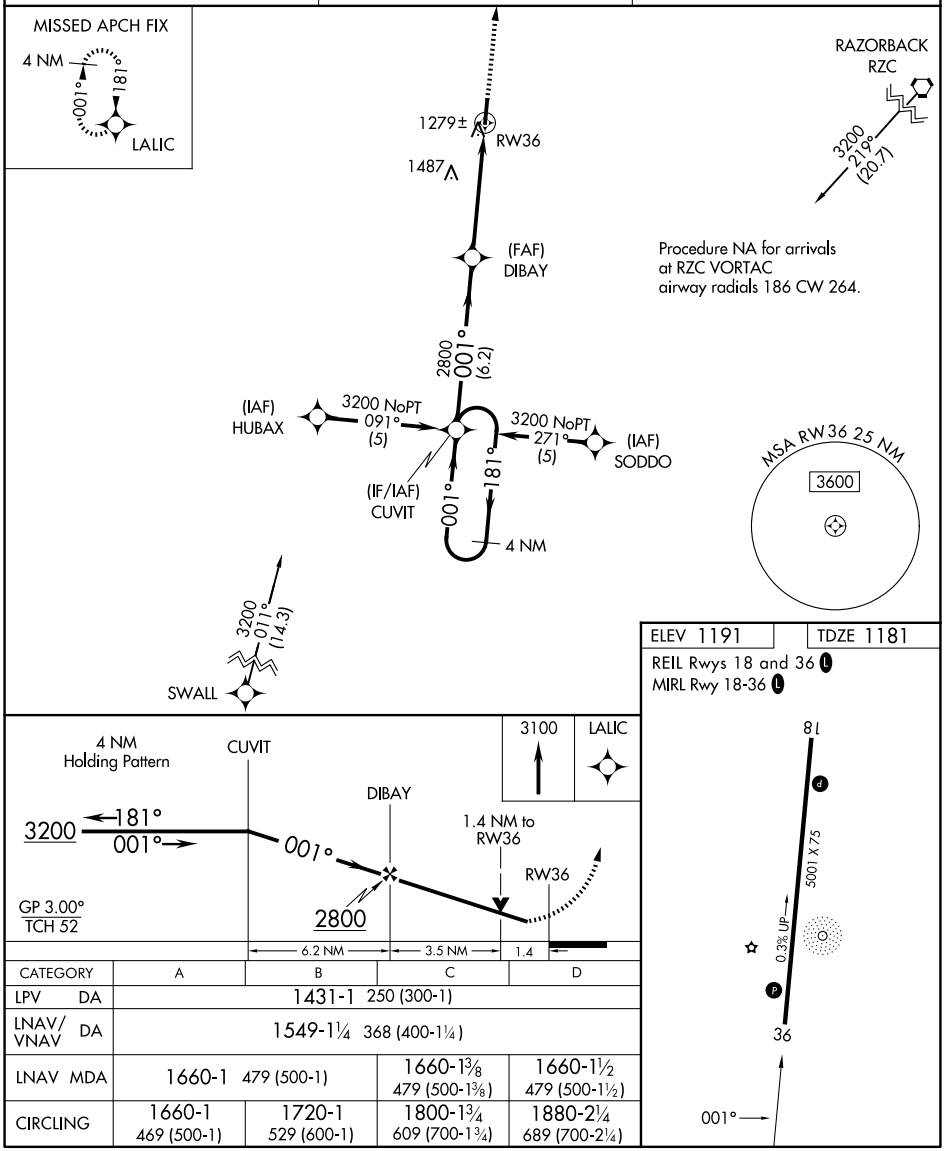

CATEGORY	A	B	C	D
LPV DA	1431-1 250 (300-1)			
LNAV/VNAV DA	1549-1¼ 368 (400-1¼)			
LNAV MDA	1660-1 479 (500-1)		1660-1⅜ 479 (500-1⅜)	1660-1½ 479 (500-1½)
CIRCLING	1660-1 469 (500-1)	1720-1 529 (600-1)	1800-1¾ 609 (700-1¾)	1880-2¼ 689 (700-2¼)

SC-1, 03 SEP 2026 to 01 OCT 2026
SC-1, 03 SEP 2026 to 01 OCT 2026