

WAAS CH 86905 W04A	APP CRS 040°	Rwy Ldg 4775 TDZE 58 Apt Elev 72
--	------------------------	---


RNAV (GPS) RWY 4
EASTON/NEWNAM FLD (ESN)

RNP APCH - GPS.

T When local altimeter setting not received, use Cambridge altimeter setting; increase LPV DA to 303 feet, LNAV/VNAV DA to 670 feet and visibility $\frac{1}{8}$ SM; increase all MDAs 60 feet and visibility $\frac{1}{8}$ SM. **A** LNAV Cat C/D and Circling Cat C $\frac{1}{8}$ SM, and Circling Cat D $\frac{1}{4}$ SM. VDP and Baro-VNAV NA when using Cambridge altimeter setting. Circling Rwy 15, 33 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:
Climb to 700 then
climbing right turn to
2000 direct ORETE
and hold.

ATIS 124.475	POTOMAC APP CON 133.75 254.35	EASTON TOWER ★ 118.525 (CTAF) 0	GND CON 119.075
------------------------	---	---	---------------------------

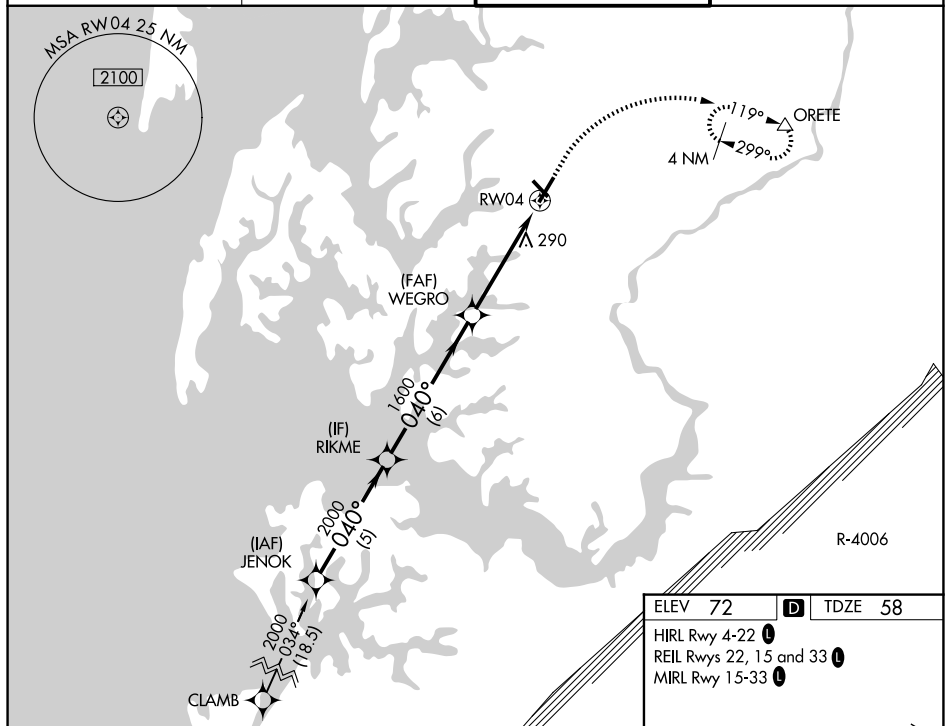

GP 3.00°
TCH 44

JENOK RIKME WEGRO

2000 040° 2000 040° 1600 1600 1.6

5 NM 6 NM 3.1 NM 1.6

CATEGORY A B C D

LPV DA 258- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)

LNAV/VNAV DA 625-1 $\frac{5}{8}$ 567 (600-1 $\frac{5}{8}$)

LNAV MDA 600-1 542 (600-1) 600-1 $\frac{5}{8}$ 542 (600-1 $\frac{5}{8}$)

CIRCLING 600-1 528 (600-1) 640-1 568 (600-1) 640-1 $\frac{5}{8}$ 568 (600-1 $\frac{5}{8}$) 740-2 668 (700-2)

700 2000 ORETE

*1.6 NM to RW04 *LNAV only

RW04

