# RNAV (GPS) RWY 28

SCHOOLCRAFT COUNTY (ISQ)

| WAAS | APP CRS | Rwy Ldg | 5001 |
|---|---|---|---|
| CH 53527 | 275° | TDZE | 682 |
| W28A | | Apt Elev | 684 |

T A When local altimeter setting not received, use Beaver Island altimeter setting and increase all MDA 80 feet, increase LP Cat C and D and Circling Cat D visibility ¼ SM, LNAV Cat C and D visibility ⅜ SM, Circling Cat C visibility ½ SM. When VGSI inop, Straight-In/Circling Rwy 28 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling to Rwy 1/19 NA at night.

MISSED APPROACH: Climb to 2600 direct HALKI and hold.

| AWOS-3P | MINNEAPOLIS APP CON | UNICOM |
|---|---|---|
| 118.775 | 134.6 354.05 | 122.8 (CTAF) L |

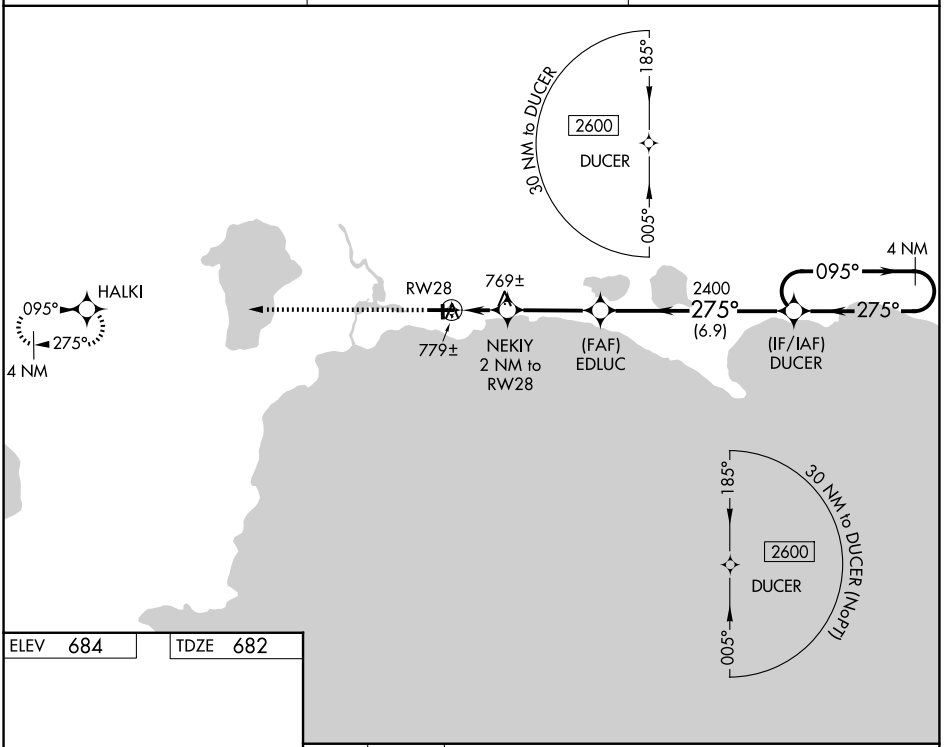


ELEV 684 TDZE 682




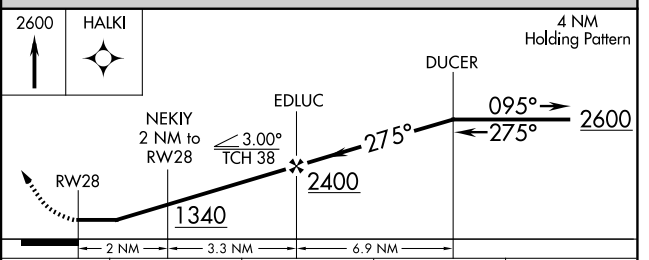


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LP MDA | 1020-1 338 (400-1) | | | |
| LNAV MDA | 1040-1 358 (400-1) | | | |
| CIRCLING | 1120-1 436 (500-1) | 1140-1 456 (500-1) | 1280-1½ 596 (600-1½) | 1300-2 616 (700-2) |

REIL Rwy 28 L
MIRL Rwy 10-28 L



EC-1, 03 SEP 2026 to 01 OCT 2026
EC-1, 03 SEP 2026 to 01 OCT 2026