

WAAS CH 62823 W21A	APP CRS 206°	Rwy Ldg 5502
	TDZE 315	
	Apt Elev 315	

RNAV (GPS) RWY 21

SIKESTON MEML MUNI (SIK)



RNP APCH.

NA

Rwy 21 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Cape Girardeau altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Cape Girardeau altimeter setting and increase all DA 49 feet and all MDA 60 feet. Increase LNAV and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct CUXID and hold.

AWOS-3PT 119.175	MEMPHIS CENTER 133.65 292.15	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

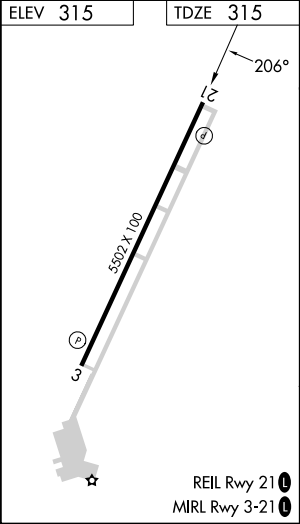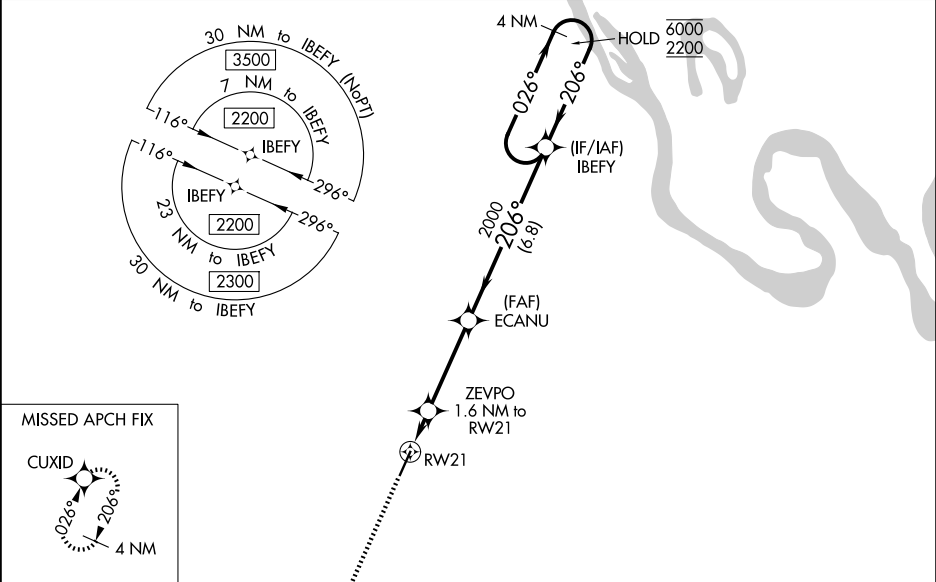

--	--