


WAAS CH 56304 W16A	APP CRS 165°	Rwy Ldg TDZE 1055 Apt Elev 1060
--	------------------------	---


RNAV (GPS) RWY 16

ROSEAU MUNI/RUDY BILLBERG FLD (R.O.X)

RNP APCH - GPS. ⚠ Circling NA to Rwy's 6 and 24. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to 7/8 SM. Inop table does not apply to LPV all Cats.	MALSF 	MISSED APPROACH: Climb to 2800 direct ACEBO and hold.
--	-----------	--

AWOS-3PT 118.075	MINNEAPOLIS CENTER 134.75 251.1	UNICOM 122.8 (CTAF)
----------------------------	---	-------------------------------

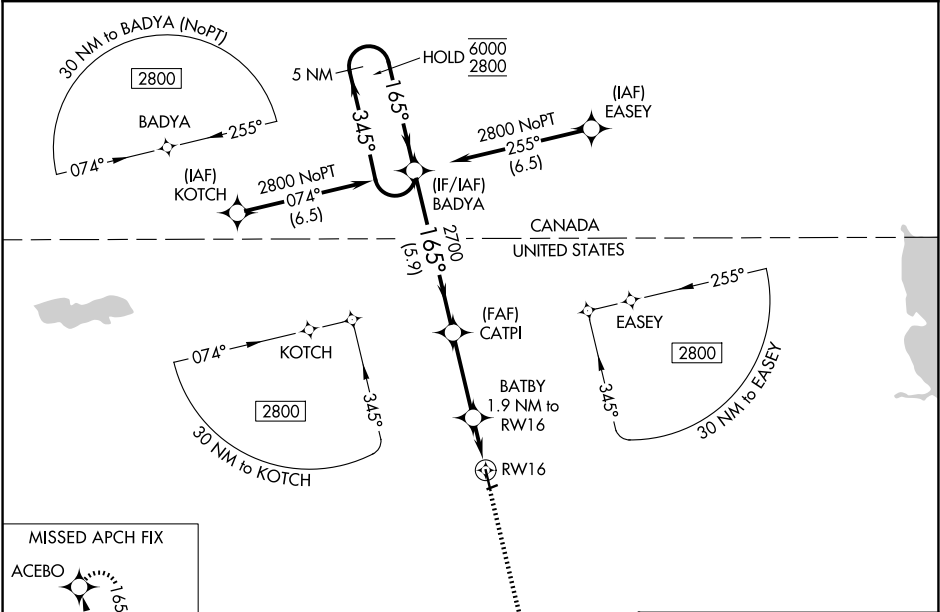

					
5 NM Holding Pattern 6000 ← 345° 2800 → 165°		BADYA	CATPI 2700	BATBY 1.9 NM to RW16	2800 ACEBO ↑ ✦
GP 3.00° TCH 44		2700		1700	1 NM to RW16 RW16
		5.9 NM		3.1 NM	0.9 NM 1 NM
CATEGORY	A	B	C	D	
LPV DA	1255-3/4 200 (200-3/4)				
LNAV/VNAV DA	1330-3/4 275 (300-3/4)				
LNAV MDA	1420-3/4 365 (400-3/4)				
CIRCLING	1600-1	540 (600-1)	1840-2 1/4 780 (800-2 1/4)	1840-2 1/2 780 (800-2 1/2)	

