

LOC I-GBY	APP CRS	Rwy Ldg	7221
109.7	125°	TDZE	1183
		Apt Elev	1183

ILS or LOC RWY 12

SOUTHWEST MINNESOTA RGNL MARSHALL/RYAN FLD (MML)

ADF or DME required.

▼


NA

When local altimeter setting not received, use Tracy Muni altimeter setting and increase ILS DA to 1441 feet and all MDA 60 feet, S-LOC Cat C/D visibility 1/8 SM and Circling visibility Cat C/D 1/4 SM. Inop table does not apply. For inop ALS increase S-LOC 12 all Cats visibility to 1 SM. Inop table does not apply when using Tracy Muni altimeter setting. For inop ALS when using Tracy Muni altimeter setting, increase S-LOC 12 Cat A/B visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct GARNO LOM/ MML 4.9 DME and hold.

AWOS-3PT	MINNEAPOLIS CENTER	GCO	UNICOM
120.150	127.1 290.2	121.725	122.8 (CTAF) 0

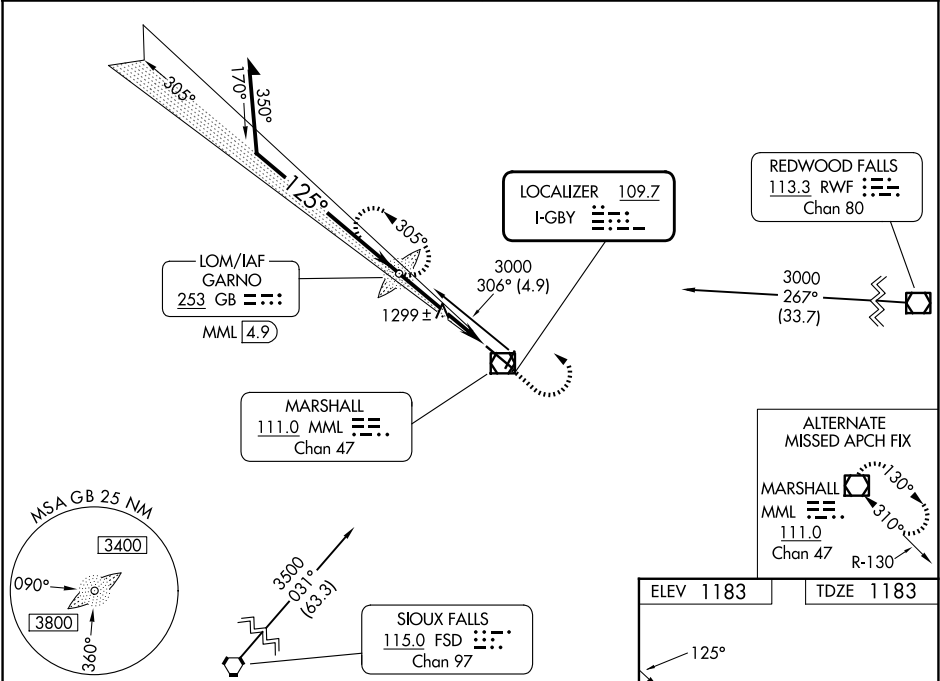

Remain within 10 NM 3000 305° 125° 2547 2600 4.1 NM GB GARNO LOM MML 4.9 6000 2000 3000 GB GS 3.00° TCH 49 MML 0.8				
CATEGORY	A	B	C	D
S-ILS 12	1383-1/2 200 (200-1/2)			
S-LOC 12	1560-1/2 377 (400-1/2)		1560-5/8 377 (400-5/8)	
CIRCLING	1640-1 457 (500-1)		1820-13/4 637 (700-13/4)	1840-2 657 (700-2)

7221 X 100

3999 X 75

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

FAF to MAP 4.1 NM

Knots

60

90

120

150

180

Min:Sec

4:06

2:44

2:03

1:38

1:22

HIRL Rwy 12-30 1

REIL Rwys 2 and 20 1

MIRL Rwy 2-20 1