

Rwy Ldg	7221
TDZE	1183
Apt Elev	1183

RNAV (GPS) RWY 12

SOUTHWEST MINNESOTA RGNL MARSHALL/RYAN FLD (MML)

RNP APCH-GPS

Baro-VNAV and VDP NA when using Tracy Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C. When local altimeter setting not received, use Tracy Muni altimeter setting and increase LPV DA to 1441 feet; LNAV/VNAV DA to 1548 and all Cats settings ½ SM; increase all MDA 60 feet, LNAV visibility Cat C/D ½ SM and Circling visibility Cat C/D ¼ SM. For non ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat C/D visibility to 1 SM. For non ALS when using Tracy Muni altimeter setting, increase LNAV/VNAV all Cats visibility to 1 SM.

MALSR



MISSED APPROACH:
Climb to 3000 direct
BOPMY and hold.

AWOS-3PT
120.150

MINNEAPOLIS CENTER
127.1 290.2

GCO
121.725

UNICOM
122.8 (CTAF) **L**

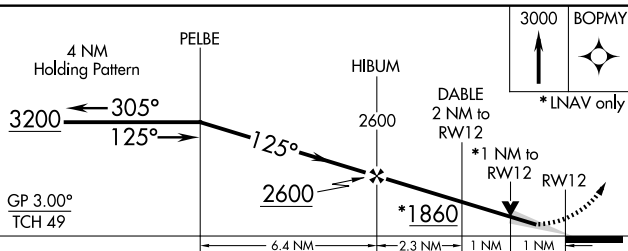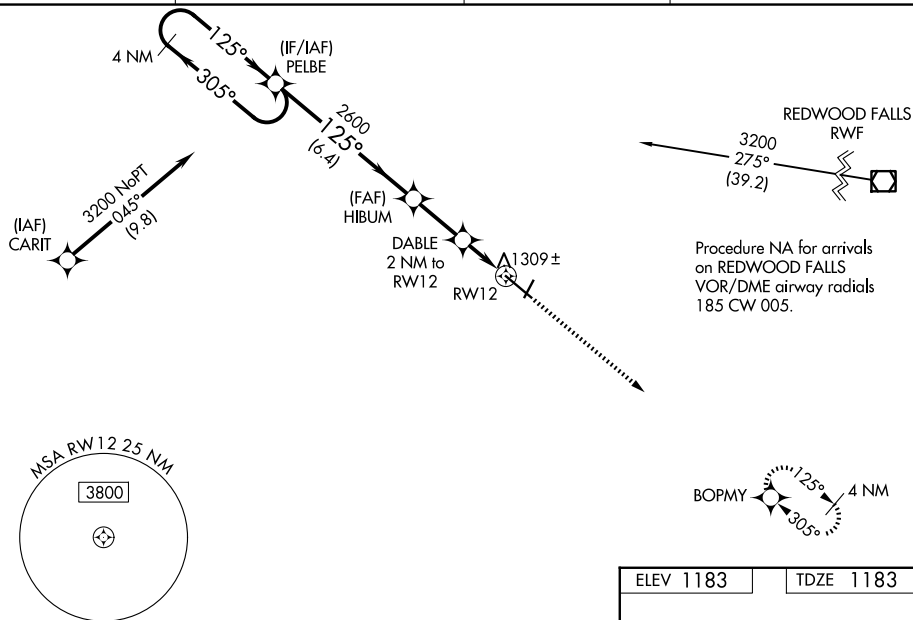

CATEGORY	A	B	C	D
LPV DA	1383- 1/2 200 (200-1/2)			
LNAV/ VNAV DA	1490- 1/2 307 (400-1/2)			
LNAV MDA	1560- 1/2 377 (400-1/2)		1560-5/8 377 (400-5/8)	
CIRCLING	1640-1 457 (500-1)		1820-13/4 637 (700-13/4)	1840-2 657 (700-2)

