

WAAS CH 78403 W24A	APP CRS 234°	Rwy Idg TDZE 847 Apt Elev 859
--	------------------------	---

RNAV (GPS) RWY 24

ALBERTUS (F'EP)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
When local altimeter setting not received, use Chicago/Rockford altimeter setting:
increase LPV and LNAV/VNAV DA to 1164 feet; increase all MDA 80 feet and LNAV
visibility Cat C/D and Circling Cat C/D visibility ¼ SM. Baro-VNAV and VDP NA when
using Chicago/Rockford altimeter setting. Circling NA to Rwy's 13, 18, 31, 36.
For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM. For inop ALS,
when using Chicago/Rockford altimeter setting, increase LPV and LNAV/VNAV all
Cats visibility to ½ SM and LNAV C/D visibility to 1 ½ SM.

MALSR

MISSED APPROACH:
Climb to 2600 direct
HANKS and hold.

AWOS-3 120.525	ROCKFORD APP CON 126.0 327.0	CLNC DEL 121.85	UNICOM 122.8 (CTAF)
--------------------------	--	---------------------------	-------------------------------

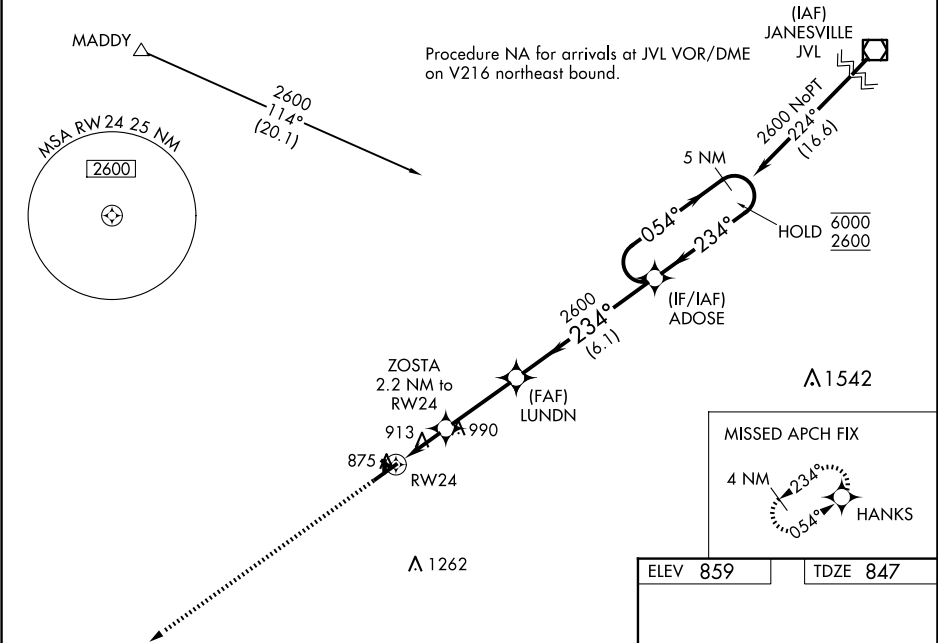

2600	HANKS	LUNDN	ADOSE	5 NM Holding Pattern
0.9 NM to RW24	0.9 NM to RW24	2.2 NM to RW24	2600	6000
1580	234°	234°	054°	2600
0.9	1.3 NM	3.1 NM	6.1 NM	GP 3.00° TCH 45°
CATEGORY	A	B	C	D
LPV DA		1097-½	250 (300-½)	
LNAV/VNAV DA		1097-½	250 (300-½)	
LNAV MDA		1180-½	333 (400-½)	
CIRCLING	1320-1 461 (500-1)	1400-1 541 (600-1)	1440-1½ 581 (600-1½)	1620-2½ 761 (800-2½)

