WAAS	APP CRS	Rwy Ldg	3763
CH 48838	201°	TDZE	765
W20A		Apt Elev	765

RNAV (GPS) RWY 20

CENTERVILLE MUNI (GHM)

NA

Obtain local altimeter setting on CTAF, when not received, use Columbia/Mount Pleasant altimeter setting and increase all MDA 80 feet. Increase LP Cats C and D visibility ¼ mile; LNAV Cats C and D ⅛ mile; Circling Cat D ¼ mile. DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 direct WOGUT and hold.

NASHVILLE APP CON	UNICOM
119.35 372.0	122.8 (CTAF) L

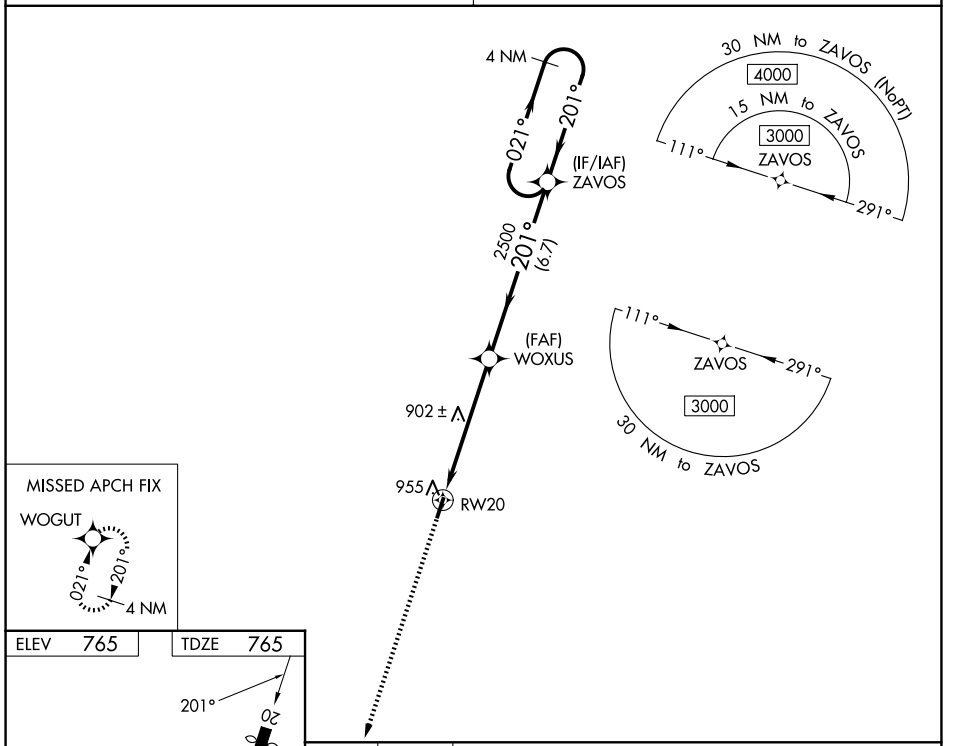

CATEGORY	A	B	C	D
LP MDA	1160-1 395 (400-1)		1160-1⅛ 395 (400-1⅛)	
LNAV MDA	1220-1 455 (500-1)		1220-1⅜ 455 (500-1⅜)	
CIRCLING	1260-1 495 (500-1)		1280-1½ 515 (600-1½)	1520-2½ 755 (800-2½)

MIRL Rwy 2-20 L
REIL Rwys 2 and 20

SE-1, 03 SEP 2026 to 01 OCT 2026
SE-1, 03 SEP 2026 to 01 OCT 2026