RNAV (GPS) RWY 28

WAYNE COUNTY (BJJ)

WAAS CH 82215 W28A	APP CRS 277°	Rwy Ldg 4971	TDZE 1134	Apt Elev 1136

RNP APCH - GPS.

Baro-VNAV NA when using CAK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use CAK altimeter setting and increase LPV DA to 1458 feet; increase LNAV/VNAV DA to 1649 feet; increase all MDAs 60 feet; and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3000 direct JAVNE and hold.

ASOS	CLEVELAND APP CON ★	CLNC DEL	UNICOM
118.075	125.5 371.875	121.75	122.975 (CTAF) L

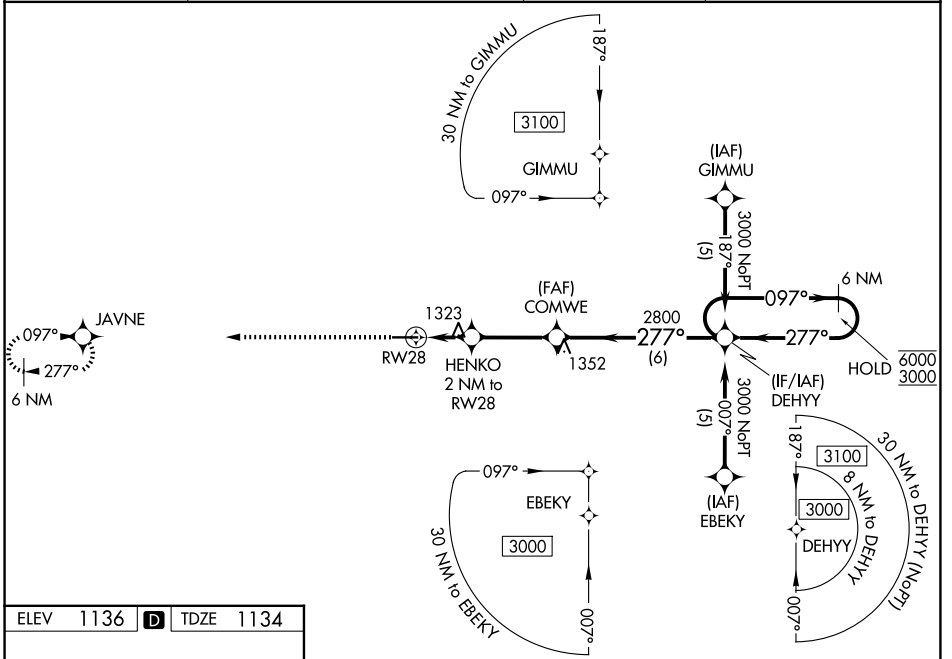

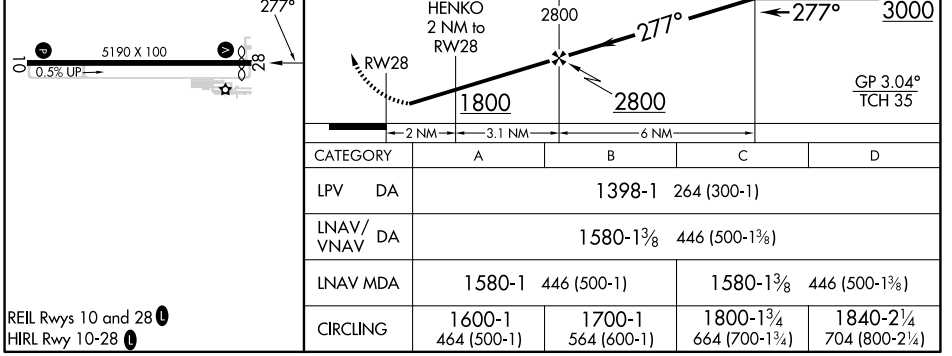

CATEGORY	A	B	C	D
LPV DA	1398-1 264 (300-1)			
LNAV/VNAV DA	1580-1⅜ 446 (500-1⅜)			
LNAV MDA	1580-1 446 (500-1)		1580-1⅜ 446 (500-1⅜)	
CIRCLING	1600-1 464 (500-1)	1700-1 564 (600-1)	1800-1¾ 664 (700-1¾)	1840-2¼ 704 (800-2¼)

REIL Rwys 10 and 28 L
HIRL Rwy 10-28 L

EC-2, 03 SEP 2026 to 01 OCT 2026
EC-2, 03 SEP 2026 to 01 OCT 2026