


WAAS CH 42820 W08A	APP CRS 077°	Rwy Ldg TDZE Apt Elev	7724 1274 1277
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 8
CENTRAL WISCONSIN (CWA)

RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV Cat C and D visibility to 1½ SM.			MALSR 	MISSED APPROACH: Climb to 3000 direct ASARE and hold.	
ATIS 127.45	MINNEAPOLIS CENTER 124.4 317.7	CWA TOWER ★ 119.75 (CTAF) 360.7		GND CON 121.9 360.7	UNICOM 122.95

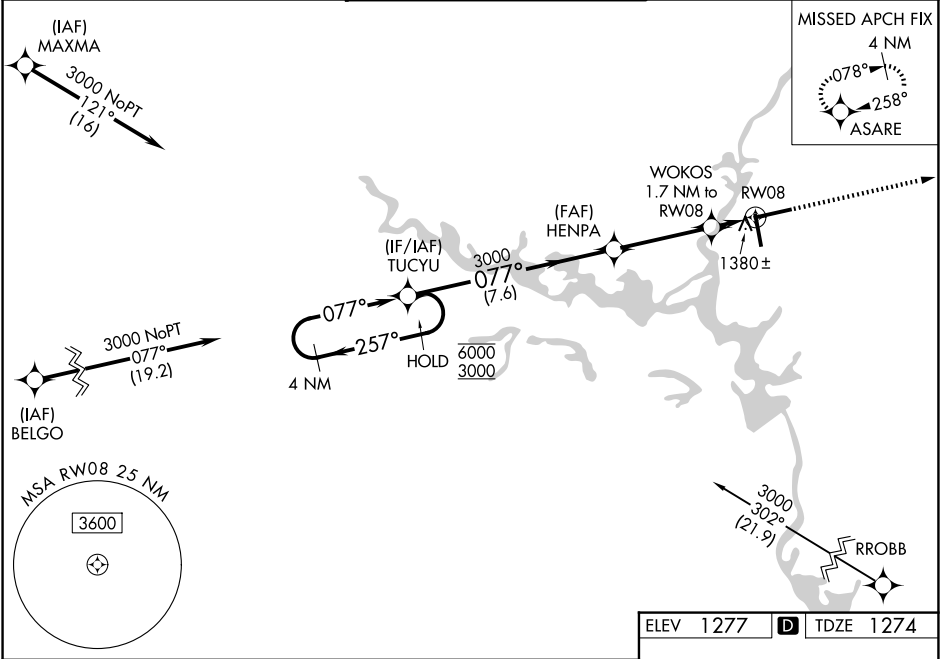

4 NM Holding Pattern		TUCYU	HENPA	WOKOS	RW08
6000 ← 257°		3000 → 077°	3000	1.7 NM to RW08	1.1 NM to RW08
GP 3.00°		1860	1860	1860	1860
TCH 55		7.6 NM	3.6 NM	0.6 NM	1.1 NM
CATEGORY	A	B	C	D	
LPV DA	1474-½		200 (200-½)		
LNAV/VNAV DA	1601-½		327 (400-½)		
LNAV MDA	1640-½	366 (400-½)	1640-¾ 366 (400-¾)		
CIRCLING	1740-1	463 (500-1)	1740-1½ 463 (500-1½)	1840-2 563 (600-2)	

ELEV 1277 D TDZE 1274

ASARE

3000

077°

TWR

7724 X 150

061 X 1059

061 X 1059

35