


WAAS CH 70417 W17A	APP CRS 173°	Rwy Ldg TDZE Apt Elev	6824 2589 2589
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17

AINSWORTH RGNL (ANW)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cats C/D visibility to ½ SM.	MALSR 	MISSED APPROACH: Climb to 5100 direct FUGLE and hold.
---	--	---

AWOS-3 118.325	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 
--------------------------	--------------------------------------	---

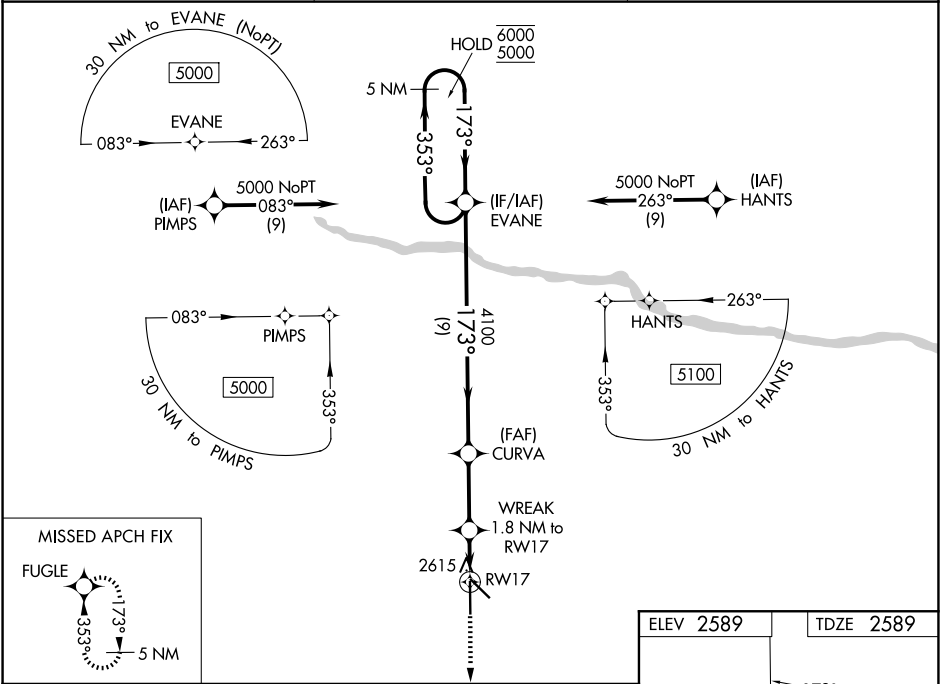

5 NM Holding Pattern				
				
EVANE				
CURVA				
WREAK 1.8 NM to RW17				
RW17				
5100 FUGLE				
*LNAV only				
*0.7 NM to RW17				
*3220				
GP 3.00° TCH 46				
9 NM 2.8 NM 1.1 NM 0.7 NM				
CATEGORY	A	B	C	D
LPV DA	2789-½ 200 (200-½)			
LNAV/VNAV DA	2839-½ 250 (300-½)			
LNAV MDA	2880-½ 291 (300-½)			
CIRCLING	3000-1 411 (500-1)	3040-1 451 (500-1)	3040-1½ 451 (500-1½)	3200-2 611 (700-2)

