

WAAS

CH 57948

W24A

APP CRS

235°

Rwy Ldg

6000

TDZE

681

Apt Elev

681

RNAV (GPS) RWY 24

MAURY COUNTY RGNL (MRC)

RNP APCH - GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.


▲

Circling NA to Rwy's 17 and 35. Baro-VNAV and VDP NA when using BNA altimeter setting. When local altimeter setting not received, use BNA altimeter setting and increase LPV DA to 1089 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1408 feet and all visibilities ⅓ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C ½ SM. For inop ALS, increase LPV Cat A and B visibility to ⅓ SM, and increase LNAV/VNAV Cat A and B visibility to 1⅓ SM.

ODALS

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct URSAW and hold.

AWOS-3 128.625	MEMPHIS CENTER 125.85 379.25	UNICOM 122.8 (CTAF) ①
-------------------	---------------------------------	--------------------------

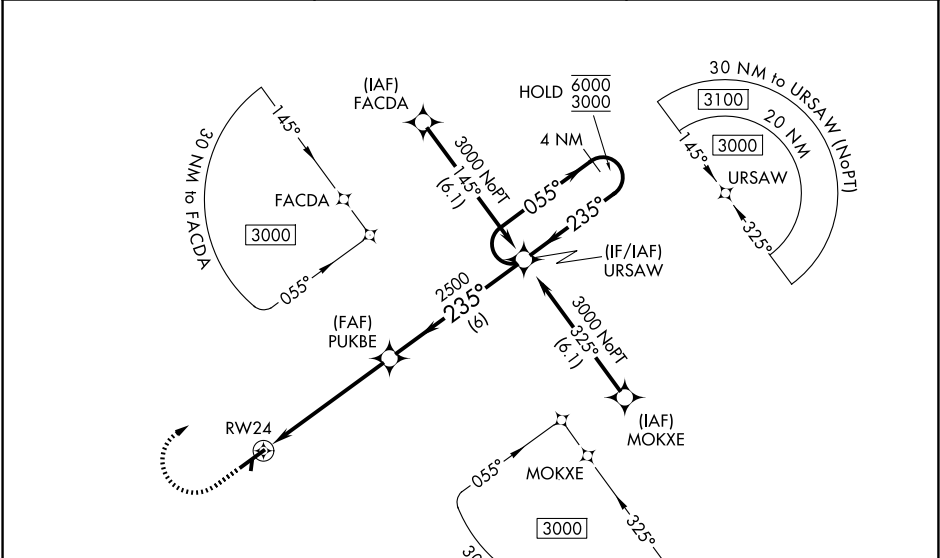

ELEV 681

TDZE 681

MIRL Rwy 6-24
REIL Rwy 6
REIL Rwy 24 ①

1200

3000

URSAW

URSAW

4 NM Holding Pattern

235°

055°

235°

1.8 NM to RW24

2500

6000

3000

GP 3.00°

TCH 39°

1.8

3.8 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	981-3/4 300 (300-3/4)			
LNAV/VNAV DA	1300-15/8 619 (700-15/8)			
LNAV MDA	1300-3/4 619 (700-3/4)	1300-15/8 619 (700-15/8)		
CIRCLING	1320-1 639 (700-1)	1360-1 679 (700-1)	1400-2 719 (800-2)	1620-3 939 (1000-3)