RNAV (GPS) RWY 21

MADISON RGNL (IMS)

WAAS	APP CRS		
CH **65943**	**215°**	Rwy Ldg	**5000**
W21A		TDZE	**819**
		Apt Elev	**819**

RNP APCH - GPS.

Rwy 21 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA for Cat C southeast of Rwy 3-21.

MISSED APPROACH: Climb to 4000 direct KOYGE and hold, continue climb-in-hold to 4000.

AWOS-3	LOUISVILLE APP CON	UNICOM
119.175	**132.075 327.0**	**123.0** (CTAF) L

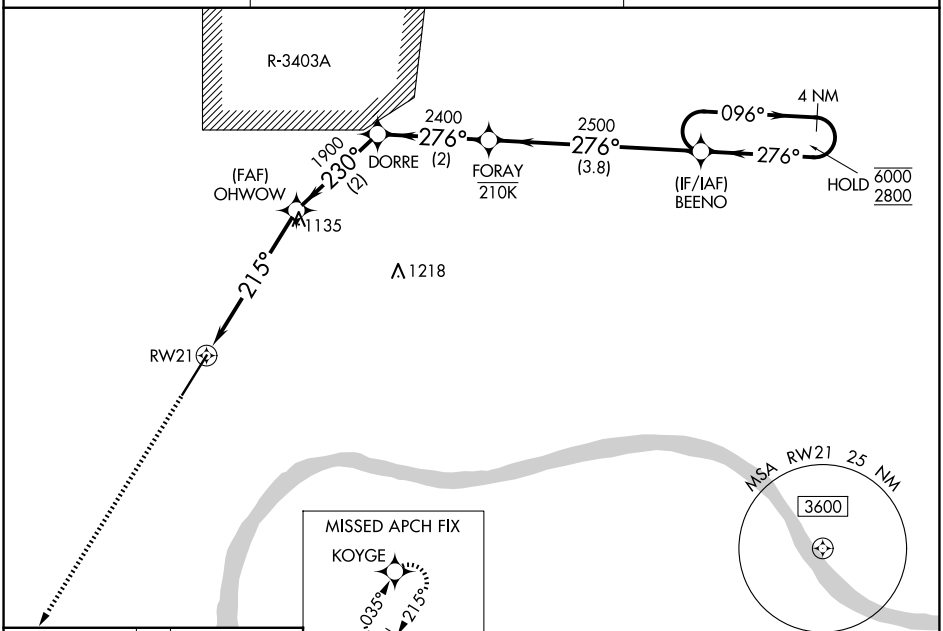

ELEV	819	TDZE	819

HIRL Rwy 3-21 L
REIL Rwy 21 L

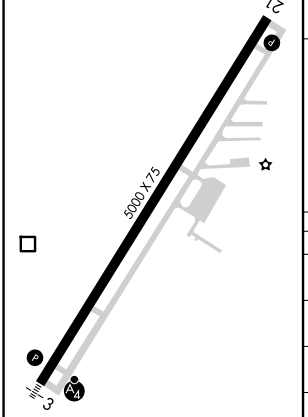

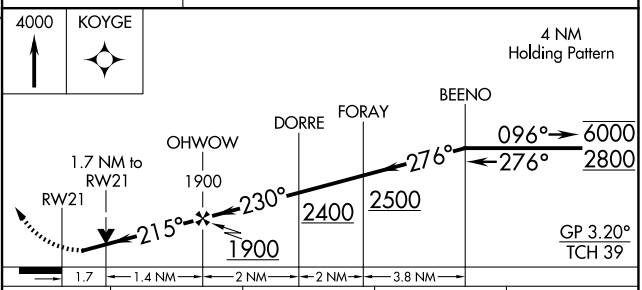

CATEGORY		A	B	C	D
LPV	DA	1099-⅞	280 (300-⅞)		NA
LNAV/VNAV	DA	1132-⅞	313 (400-⅞)		NA
LNAV MDA		1400-1	581 (600-1)	1400-1¾ 581 (600-1¾)	NA
CIRCLING		1400-1	581 (600-1)	1440-1¾ 621 (700-1¾)	NA

EC-2, 03 SEP 2026 to 01 OCT 2026
EC-2, 03 SEP 2026 to 01 OCT 2026