# RNAV (GPS) Z RWY 3

## MADISON RGNL (IMS)

| WAAS CH 45708 W03A | APP CRS 035° | Rwy Ldg 5000 TDZE 812 Apt Elev 819 |
|---|---|---|

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 3 helicopter visibility reduction below ¾ NA.

MALSF

MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 direct GAMKE and hold, continue climb-in-hold to 4000.
*Missed approach requires minimum climb of 410 feet per NM to 1900.

| AWOS-3 | LOUISVILLE APP CON | UNICOM |
|---|---|---|
| 119.175 | 132.075 327.0 | 123.0 (CTAF) L |

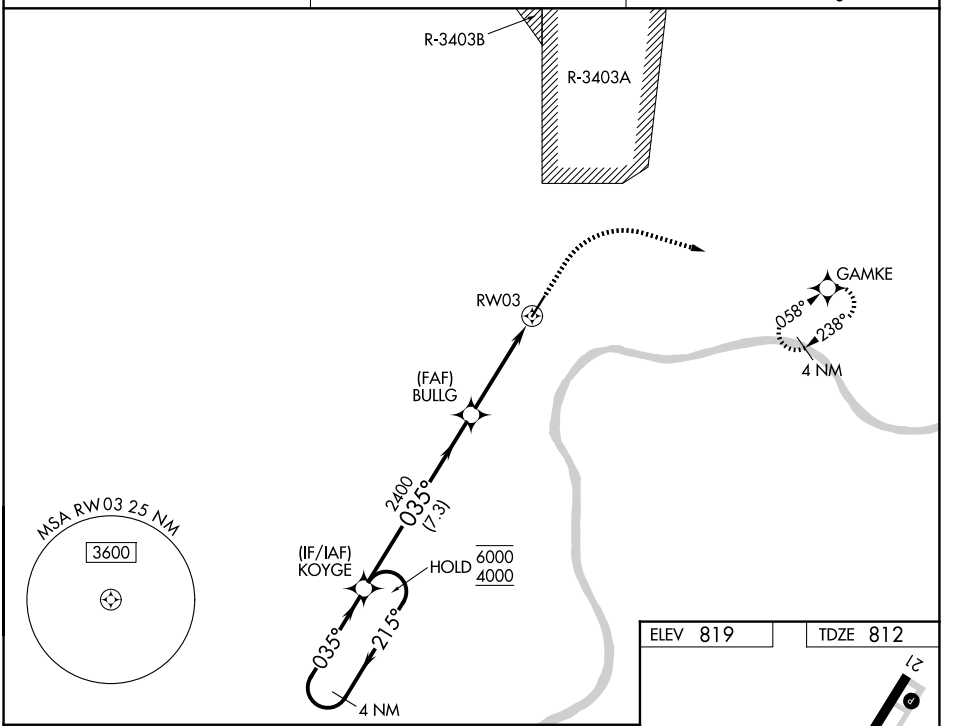


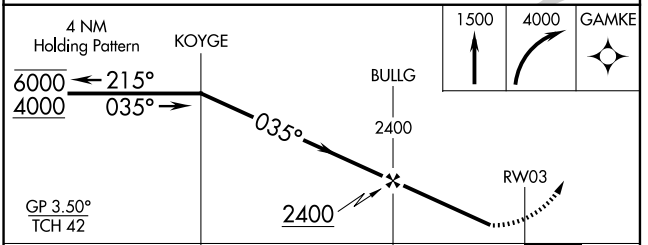


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1142-¾ 330 (400-¾) | | | NA |
| LNAV/VNAV DA* | 1143-¾ 331 (400-¾) | | | NA |
| LNAV/VNAV DA | 1420-1½ 608 (700-1½) | | | NA |



EC-2, 03 SEP 2026 to 01 OCT 2026
EC-2, 03 SEP 2026 to 01 OCT 2026