RNAV (GPS) RWY 35

AURORA STATE (UAO)

WAAS	APP CRS	Rwy Ldg	5003
CH 77508	352°	TDZE	199
W35A		Apt Elev	200

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. Rwy 35 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2500 direct LUTZZ and hold.

ATIS	PORTLAND APP CON	AURORA TOWER★	GND CON
118.525	126.0 269.175	120.35 (CTAF) L	119.15

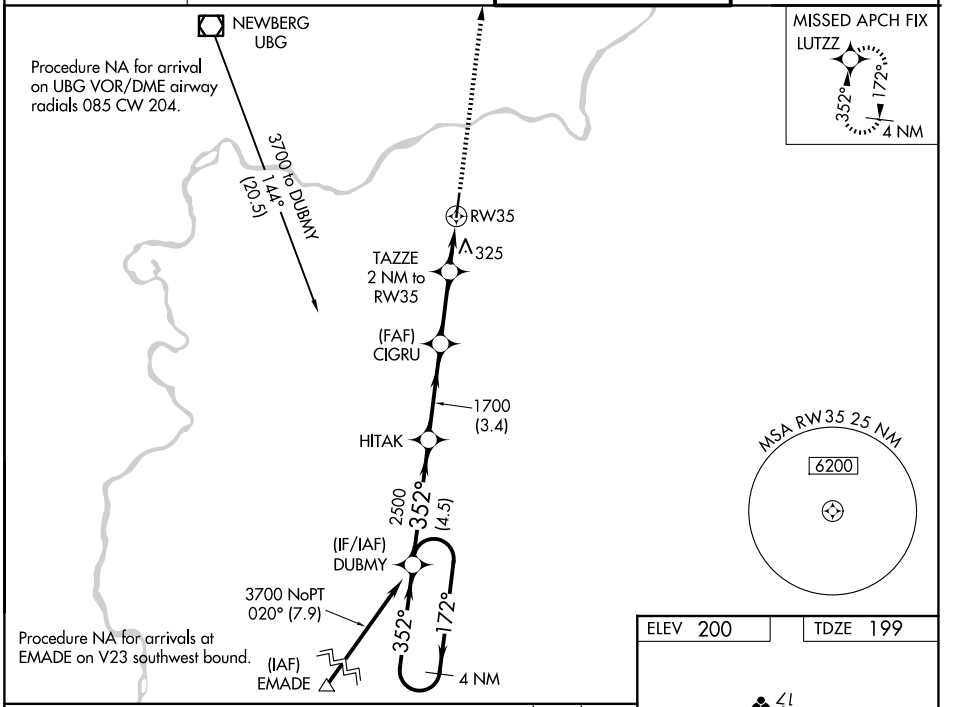

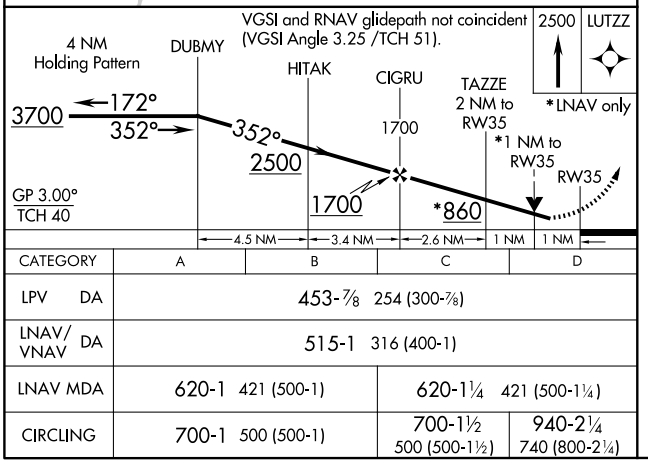

CATEGORY	A	B	C	D
LPV DA	453-⅞ 254 (300-⅞)			
LNAV/VNAV DA	515-1 316 (400-1)			
LNAV MDA	620-1 421 (500-1)		620-1¼ 421 (500-1¼)	
CIRCLING	700-1 500 (500-1)		700-1½ 500 (500-1½)	940-2¼ 740 (800-2¼)

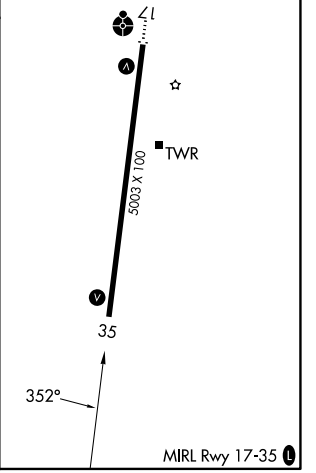

NW-1, 03 SEP 2026 to 01 OCT 2026
NW-1, 03 SEP 2026 to 01 OCT 2026