

WAAS CH 56513 W04A	APP CRS 042°	Rwy Ldg 7099 TDZE 158 Apt Elev 158
--	------------------------	---

RNAV (GPS) RWY 4

ROCKY MOUNT/WILSON RGNL (RWI)

RNP APCH - GPS.


V Baro-VNAV and VDP NA when using GWW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. When local altimeter setting not received, use GWW altimeter setting and increase LPV DA to 467 feet; increase LNAV/VNAV DA to 601 feet and all visibilities ¼ SM, increase all MDAs 60 feet and LNAV Cats C/D and Circling Cat C visibilities ¼ SM. For inop ALS, increase LNAV Cats C/D visibility to 1½ SM. For inop ALS when using GWW altimeter setting, increase LPV all Cats visibility to ¾ SM.

MALSR




MISSED APPROACH:
Climb to 2500 direct
FENIM and hold.

ASOS 118.875	WASHINGTON CENTER 123.85 279.65	UNICOM 123.05 (CTAF) 0
------------------------	---	----------------------------------

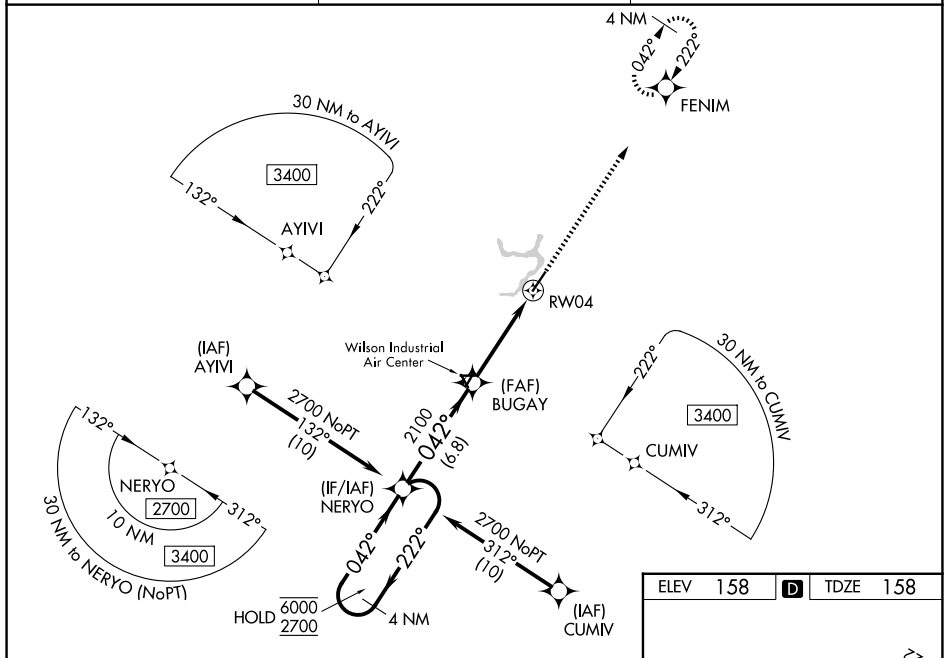

ELEV	158	D	TDZE	158
------	-----	----------	------	-----

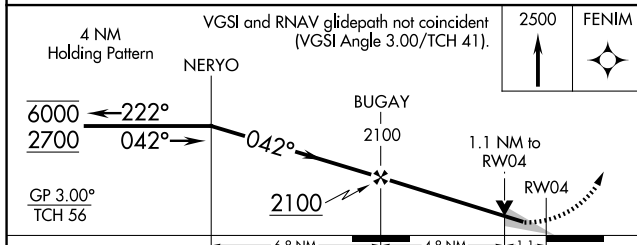

CATEGORY		A		B		C		D	
LPV	DA			408- $\frac{1}{2}$		250 (300- $\frac{1}{2}$)			
LNAV/ VNAV	DA			542- $\frac{5}{8}$		384 (400- $\frac{5}{8}$)			
LNAV	MDA	560- $\frac{1}{2}$		402 (500- $\frac{1}{2}$)		560- $\frac{3}{4}$		402 (500- $\frac{3}{4}$)	
CIRCLING		600-1		620-1		720-1 $\frac{1}{2}$		740-2	
		442 (500-1)		462 (500-1)		562 (600-1 $\frac{1}{2}$)		582 (600-2)	

