RNAV (GPS) RWY 17

SHALZ FLD (CBK)

WAAS	APP CRS	Rwy Ldg	5110
CH 78045	172°	TDZE	3188
W17A		Apt Elev	3188

RNP APCH - GPS.

T A Baro-VNAV and VDP NA when using Oakley altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Oakley altimeter setting: increase LPV DA to 3509 feet and all visibilities ¼ SM, LNAV/VNAV DA to 3509 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cat C ⅛ SM.

MISSED APPROACH: Climb to 5200 direct IKBUW and hold.

AWOS-3P	DENVER CENTER	UNICOM
118.175	132.7 226.675	122.8 (CTAF) L

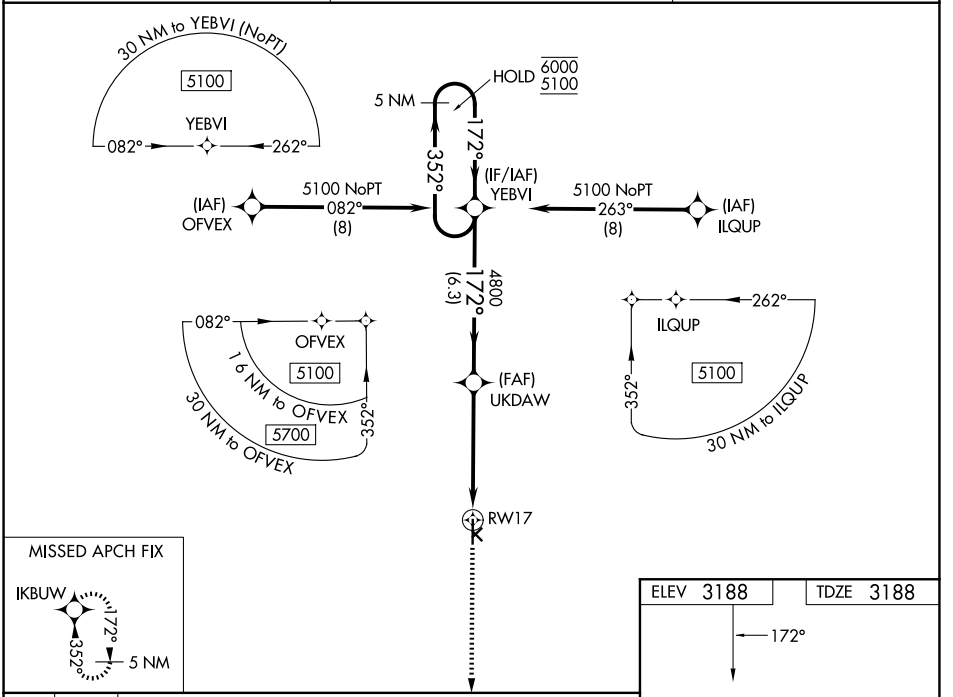

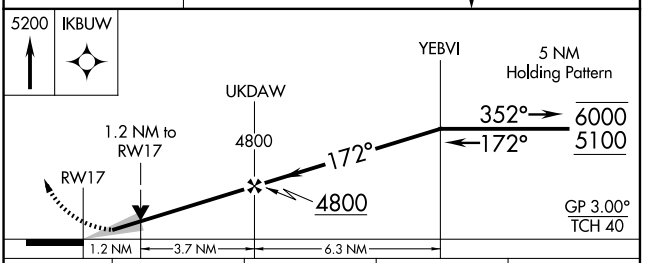

CATEGORY	A	B	C	D
LPV DA	3438-¾ 250 (300-¾)			NA
LNAV/VNAV DA	3438-¾ 250 (300-¾)			NA
LNAV MDA	3620-1 432 (500-1)		3620-1¼ 432 (500-1¼)	NA

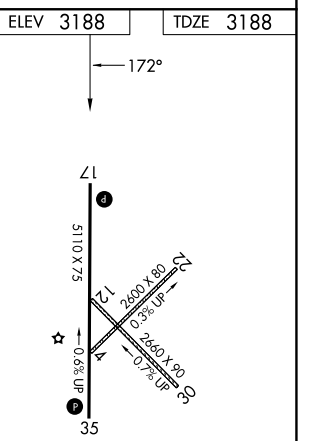

MIRL Rwy 17-35 L

REIL Rwys 17 and 35 L

NC-2, 03 SEP 2026 to 01 OCT 2026
NC-2, 03 SEP 2026 to 01 OCT 2026