

WAAS  
CH **72824**  
**W16A**

APP CRS  
**157°**

Rwy Ldg  
TDZE **413**  
Apt Elev **413**

RNAV (GPS) RWY 16

MC COMB/PIKE COUNTY/JOHN E LEWIS FLD (MCB)

RNP APCH.

▼



▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM.

MALSF

MISSED APPROACH:  
Climb to 3000 direct  
GLADS and hold.

|                        |                                      |                                  |
|------------------------|--------------------------------------|----------------------------------|
| ASOS<br><b>119.025</b> | HOUSTON CENTER<br><b>126.8 327.8</b> | UNICOM<br><b>123.05 (CTAF) 0</b> |
|------------------------|--------------------------------------|----------------------------------|

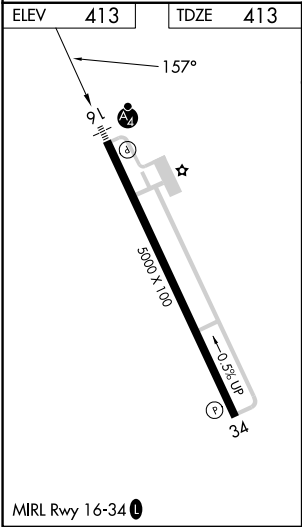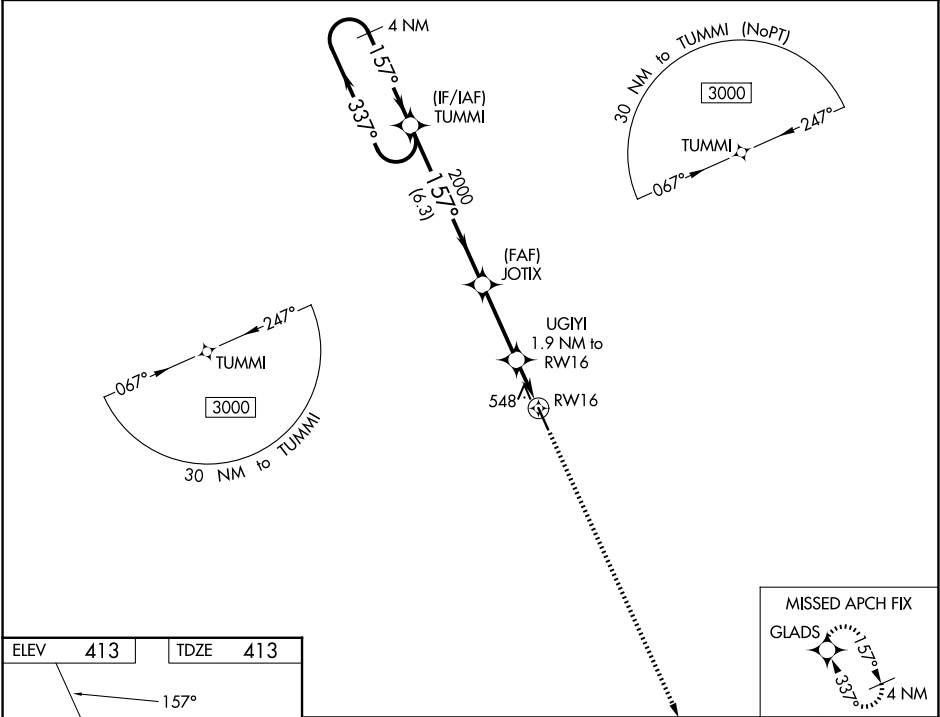

|                      |                   |             |                        |                         |      |
|----------------------|-------------------|-------------|------------------------|-------------------------|------|
| 4 NM Holding Pattern |                   | TUMMI       | JOTIX                  | UGIYI                   | RW16 |
| 3000                 |                   | 157°        | 2000                   | 1.9 NM to RW16          |      |
| GP 3.00°             |                   |             |                        |                         |      |
| TCH 42               |                   |             |                        |                         |      |
|                      |                   | 6.3 NM      | 3 NM                   | 0.8                     | 1.1  |
| CATEGORY             | A                 | B           | C                      | D                       |      |
| LPV DA               | 615-¾ 202 (300-¾) |             |                        |                         |      |
| LNAV/VNAV DA         | 709-¾ 296 (300-¾) |             |                        |                         |      |
| LNAV MDA             | 800-¾             | 387 (400-¾) | 800-7/8                | 387 (400-7/8)           |      |
| CIRCLING             | 880-1             | 467 (500-1) | 940-1½<br>527 (600-1½) | 1160-2½<br>747 (800-2½) |      |