

WAAS
CH **93835**
W22A

APP CRS
220°

Rwy Ldg
TDZE **182**
Apt Elev **182**

RNAV (GPS) RWY 22
DEXTER B FLORENCE MEML FLD (ADF')


▼

▲ NA

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hot Springs altimeter setting and increase all MDAs 120 feet, and increase LP and LNAV Cat C visibility $\frac{3}{8}$ SM and Circling Cat C visibility $\frac{1}{2}$ mile. Night landing: Rwy 22 NA. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2000 direct CUBUG and hold.

AWOS-3PT 118.175	MEMPHIS CENTER 128.475 377.15	UNICOM 122.7 (CTAF) 0
----------------------------	---	---------------------------------

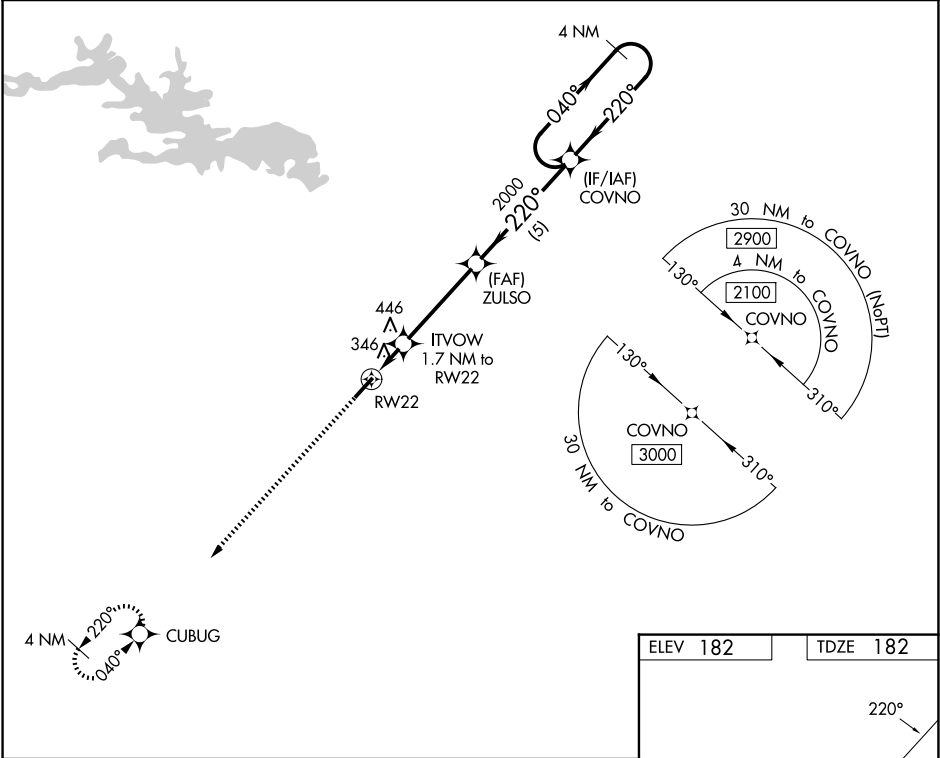

2000	CUBUG	Visual Segment - Obstacles.			
		ITVOW 1.7 NM to RW22	ZULSO	COVNO	4 NM Holding Pattern
		760	2000	2100	
		1.7	3.9 NM	5 NM	
CATEGORY	A	B	C	D	
LP MDA	600-1	418 (500-1)	600-1 $\frac{3}{8}$ 418 (500-1 $\frac{3}{8}$)	NA	
LNAV MDA	680-1	498 (500-1)	680-1 $\frac{3}{8}$ 498 (500-1 $\frac{3}{8}$)	NA	
CIRCLING	760-1 578 (600-1)	800-1 618 (700-1)	1040-2 $\frac{1}{2}$ 858 (900-2 $\frac{1}{2}$)	NA	

