

WAAS CH 99321 W24B	APP CRS 240°	Rwy Ldg TDZE 144 Apt Elev 144
--	------------------------	---

RNAV (GPS) Y RWY 24

CLINTON-SAMPSON COUNTY (CTZ)

RNP APCH-GPS.


▼

⚠

Rwy 24 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use DPL altimeter setting and increase all MDAs 60 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2500 direct WEXES and hold.

AWOS-3 119.125	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

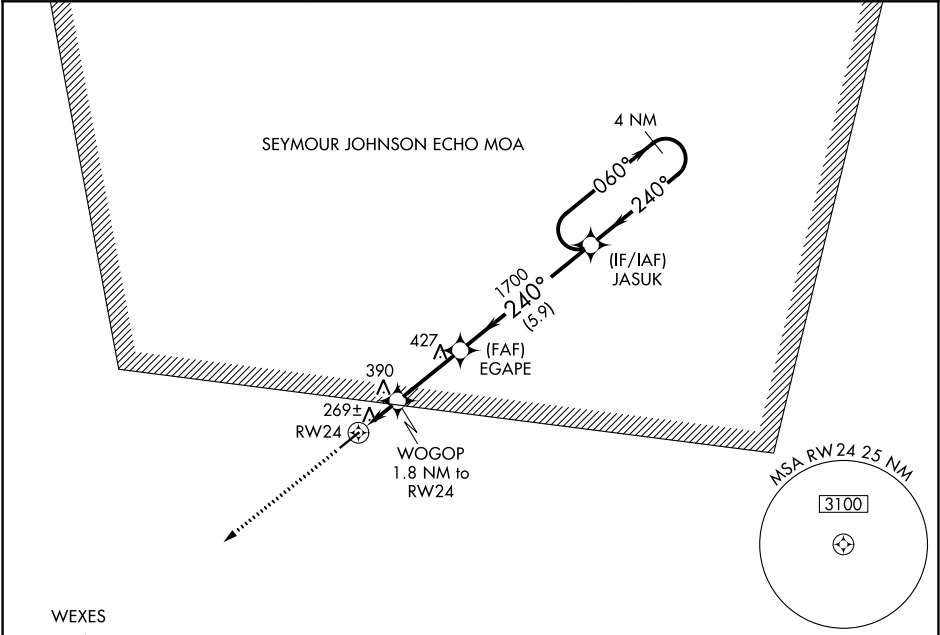

WEXES

060° 240° 4 NM

RADAR REQUIRED

2500

WEXES

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40). JASUK

WOGOP 1.8 NM to RW24

EGAPF

4 NM Holding Pattern

060° 240° 2500

3.00° TCH 45

1700

760

1.8 3 NM 5.9 NM

CATEGORY	A	B	C	D
LP MDA	560-1	416 (500-1)	560-1½	416 (500-1½)
LNAV MDA	640-1	496 (500-1)	640-1¾	496 (500-1¾)
CIRCLING	680-1 536 (600-1)	780-1 636 (700-1)	840-2 696 (700-2)	840-2¼ 696 (700-2¼)

ELEV 144 TDZE 144

240°

0.3% UP 5008 X 75

MIRL Rwy 6-24 0

REIL Rws 6 and 24 0

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT 2026