WAAS	APP CRS	Rwy Idg	6450
CH 45717	202°	TDZE	874
W20A		Apt Elev	874

RNAV (GPS) RWY 20
MCMINN COUNTY (MMI)

RNP APCH - GPS.

Circling Rwy 2 NA at night. Baro-VNAV and VDP NA when using Mc Ghee Tyson altimeter setting. Rwy 20 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Mc Ghee Tyson altimeter setting: increase LPV DA to 1275 feet and visibility all Cats ⅛ SM; increase LNAV/VNAV DA to 1819 feet and visibility all Cats 1½ SM; increase all MDAs 120 feet and LNAV visibility Cat C and D ½ SM, and Circling visibility Cat A and C ¼ SM.

MISSED APPROACH: Climb to 4100 direct ZAGUG and hold.

AWOS-3	KNOXVILLE APP CON	UNICOM
125.425	123.9 353.6	122.8 (CTAF)

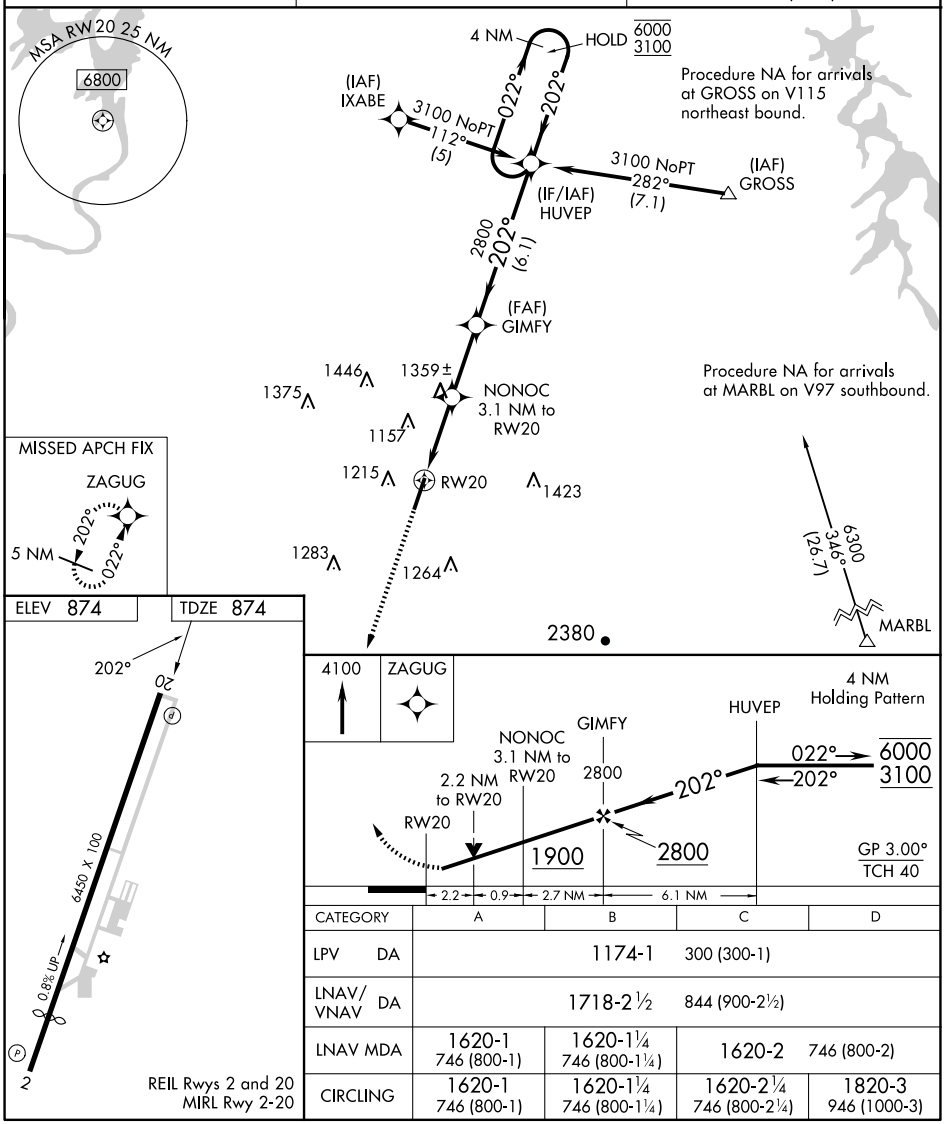

CATEGORY	A	B	C	D
LPV DA	1174-1		300 (300-1)	
LNAV/VNAV DA	1718-2½		844 (900-2½)	
LNAV MDA	1620-1 746 (800-1)	1620-1¼ 746 (800-1¼)	1620-2	746 (800-2)
CIRCLING	1620-1 746 (800-1)	1620-1¼ 746 (800-1¼)	1620-2¼ 746 (800-2¼)	1820-3 946 (1000-3)

SE-1, 03 SEP 2026 to 01 OCT 2026
SE-1, 03 SEP 2026 to 01 OCT 2026