ILS or LOC RWY 13

ST CLOUD SKY CENTRAL (STC)

LOC I-BPM	APP CRS		
111.9	133°	Rwy Ldg	7000
		TDZE	1031
		Apt Elev	1031

DME required.

For inop ALS when using Little Falls altimeter setting, increase S-ILS-13 all Cats visibility to ⅞ SM. When local altimeter setting not received, use Little Falls altimeter setting, increase DA to 1307 feet; increase all MDAs 80 feet and S-LOC 13 visibility Cats C and D ⅛ SM, and Circling visibility Cats C and D ¼ SM. For inop ALS, increase S-LOC 13 Cats C and D visibility to 1¾ SM. DME from STC VOR/DME. DME use requires simultaneous reception of I-BPM and STC DME. VDP NA when using Little Falls altimeter setting.

MALSR

MISSED APPROACH: Climb to 2500 then climbing left turn to 5000 direct STC VOR/DME and on STC VOR/DME R-312 to SIYON/STC 14.5 DME and hold.

ATIS	MINNEAPOLIS CENTER	ST. CLOUD TOWER *	GND CON
119.375	121.05 235.775	118.25 (CTAF) L	123.75

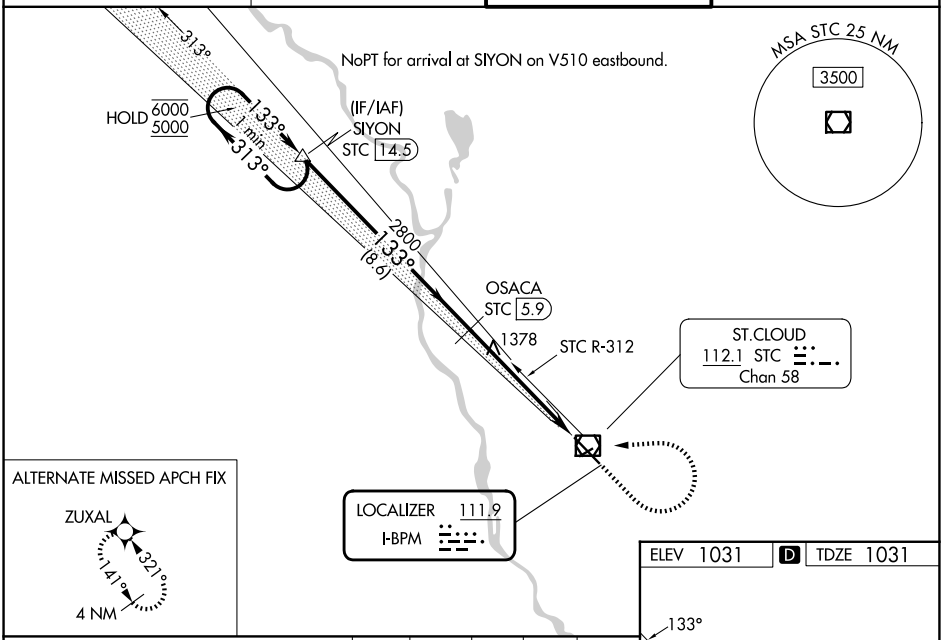

ALTERNATE MISSED APCH FIX

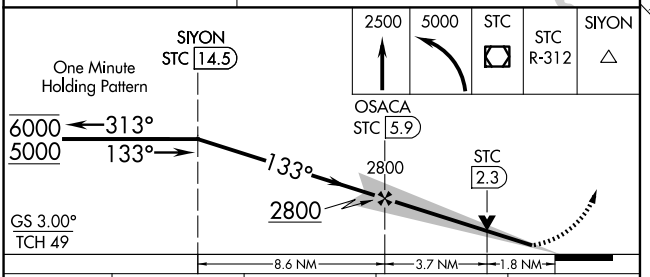

ELEV 1031 D TDZE 1031



MIRL Rwy 5-23 L
HIRL Rwy 13-31 L

CATEGORY	A	B	C	D
S-ILS 13	1231-½ 200 (200-½)			
S-LOC 13	1640-½ 609 (700-½)		1640-1⅜ 609 (700-1⅜)	
CIRCLING	1640-1 609 (700-1)		1640-1¾ 609 (700-1¾)	1860-2¾ 829 (900-2¾)

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

NC-1, 03 SEP 2026 to 01 OCT 2026
NC-1, 03 SEP 2026 to 01 OCT 2026