

WAAS CH 90237 W03A	APP CRS 028°	Rwy Ldg 3701 TDZE 2595 Apt Elev 2595
--	------------------------	---

RNAV (GPS) RWY 3

MILLER FLD (VTN)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use ANW altimeter setting and increase all DA to 2916 feet. Increase all MDAs 80 feet. Baro-VNAV and VDP NA when using ANW altimeter setting.

MISSED APPROACH:
Climb to 5000 direct
MAIMS and hold,
continue climb-in-hold
to 5000.

ASOS 118.075	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

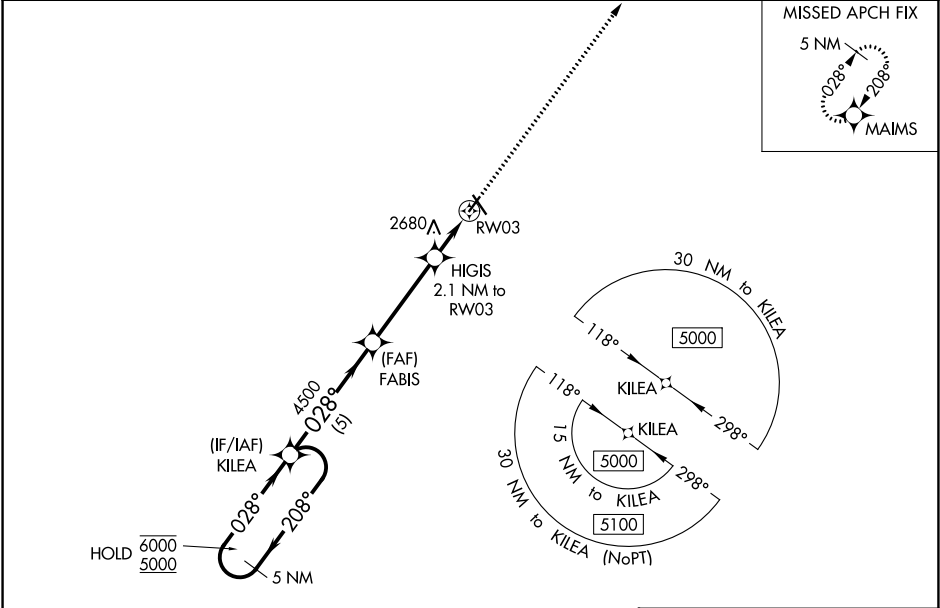

ELEV 2595 TDZE 2595

5 NM Holding Pattern

GP 3.00°
TCH 39

5 NM 3.8 NM 1.1 NM 1 NM

5000 MAIMS

1 NM to RW03

3701 X 60

4705 X 35

028°

CATEGORY	A	B	C	D
LPV DA	2845-1	250 (300-1)		NA
LNAV/VNAV DA	2845-1	250 (300-1)		NA
LNAV MDA	2940-1	345 (400-1)		NA
CIRCLING	3080-1 485 (500-1)	3560-1½ 965 (1000-1½)		NA

REIL Rwy 32 0
MIRL Rwy 3-21 and 14-32 0

NC-2, 03 SEP 2026 to 01 OCT 2026

NC-2, 03 SEP 2026 to 01 OCT 2026