


WAAS CH 78038 W04A	APP CRS 046°	Rwy Ldg TDZE 420 Apt Elev 421
--	------------------------	---

RNAV (GPS) RWY 4

HUMBOLDT MUNI (M53)

RNP APCH - GPS.	T NA Rwy 4 helicopter visibility reduction below 1 SM NA. Procedure NA at night. Use MKL altimeter setting; when not received, use DYR altimeter setting and increase all MDAs 60 feet; increase LP Cats C/D visibility ½ SM and increase LNAV Cats C/D and Circling Cats C/D visibility ¼ SM.	MISSED APPROACH: Climb to 3000 direct FASKA and hold.
-----------------	---	--

MKL ASOS 119.325	MEMPHIS CENTER 134.65 316.15	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

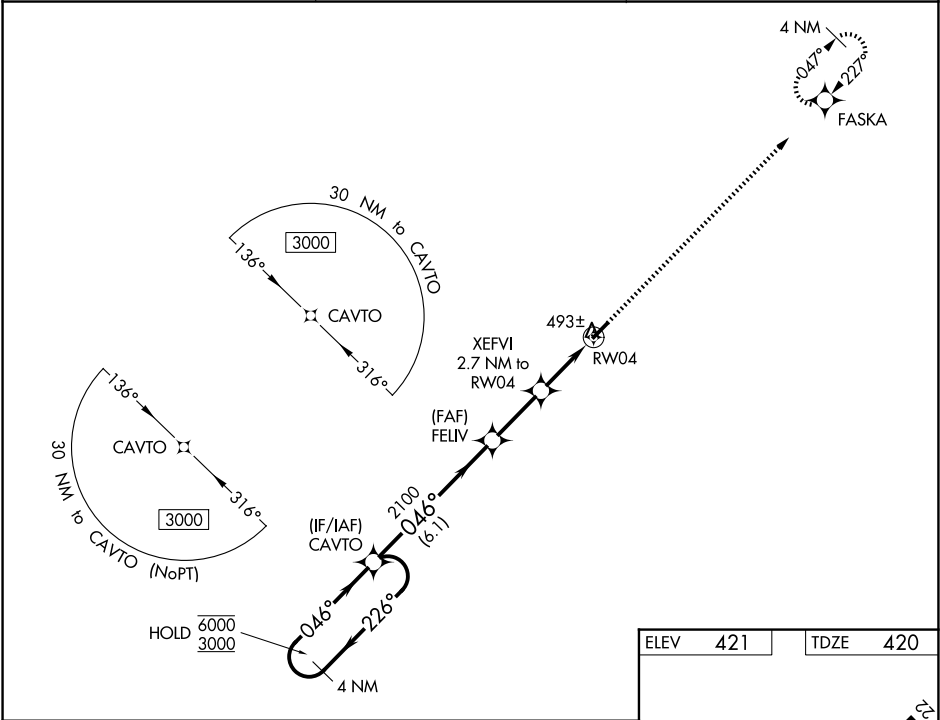

4 NM

Holding Pattern

Visual Segment - Obstacles.

3000

↑

FASKA

✦

CAVTO

6000

3000

←226°

046°→

046°

FELIV

✦

2100

1300

XEVI

2.7 NM to RW04

RW04

→

↗

6.1 NM

2.5 NM

2.7 NM

CATEGORY	A	B	C	D
LP MDA	780-1 360 (400-1)			
LNAV MDA	820-1 400 (400-1)	820-1½ 400 (400-1½)		
CIRCLING	900-1 479 (500-1)	920-1 499 (500-1)	1120-2 699 (700-2)	1120-2¼ 699 (700-2¼)

