

WAAS CH 72806 W18A	APP CRS 176°	Rwy Ldg 6500 TDZE 414 Apt Elev 425
--	------------------------	---

RNAV (GPS) RWY 18
ROSCOE TURNER (CRX)

RNP APCH-GPS.

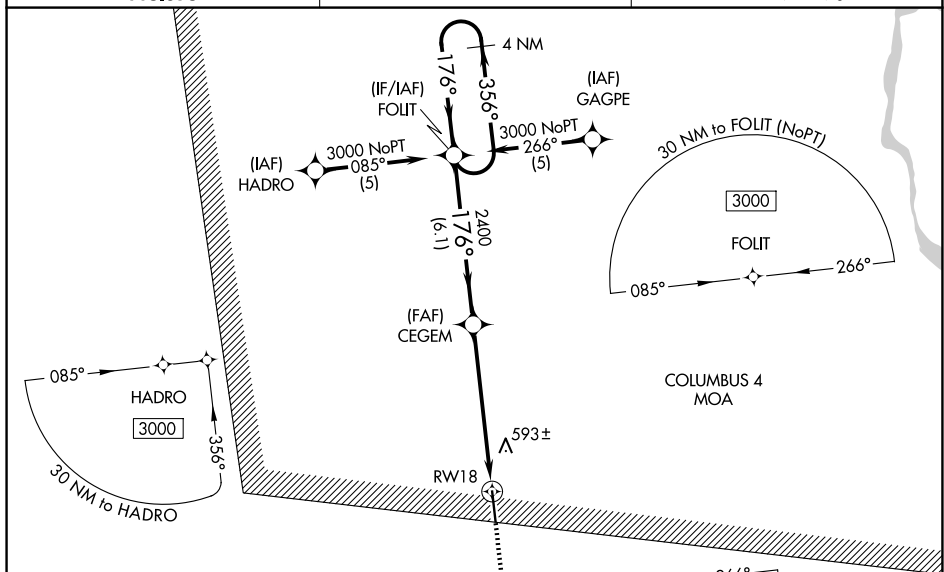
T Baro-VNAV NA when using Selmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP NA when using Selmer altimeter setting. When local altimeter setting not received, use Selmer altimeter setting and increase LPV DA to 682 feet, increase LNAV/VNAV DA to 812 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ½ SM and Circling visibility Cats C and D ½ SM. For inop ALS when using Selmer altimeter setting, increase LPV all Cats visibility to ½ SM and LNAV visibility Cats C and D to 1 ½ SM.

MALSR
A5

MISSED APPROACH:
Climb to 3000 direct
WEDGO and hold.

AWOS-3PT
118.675

MEMPHIS CENTER
135.9 273.55

UNICOM
122.8 (CTAF) **L**

ELEV 425 TDZE 414

176°

81

6500 X 100

0.3% UP

36

MIRL Rwy 18-36

MISSED APCH FIX

WEDGO

76°

356

4 NM

4 NM Holding Pattern

3000

356°

176°

FOLIT

CEDEM

1.5 NM to RW18

6.1 NM

4.5 NM

1.5 NM

GP 3.00° TCH 46

VGSIs and RNAV glidepath not coincident (VGSIs Angle 3.00/TCH 50)

3000

WEDGO

RW18