RNAV (GPS) RWY 33

PLATTEVILLE MUNI (PVB)

WAAS	APP CRS	Rwy Ldg	4000
CH 40115	326°	TDZE	1025
W33A		Apt Elev	1025

RNP APCH - GPS

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use DBQ altimeter setting and increase LPV DA to 1331 feet; increase LNAV/VNAV DA to 1497 feet and all Cats visibilities ¼ SM; increase all MDAs 60 feet, increase LNAV and Circling Cat C visibility ¼ SM. Baro-VNAV and VDP NA when using DBQ altimeter setting. Circling Rwy 7, 25 NA at night.

MISSED APPROACH: Climb to 3000 direct CEWUF and hold.

AWOS-3	CHICAGO CENTER	UNICOM
120.575	133.95 281.4	122.7 (CTAF) L

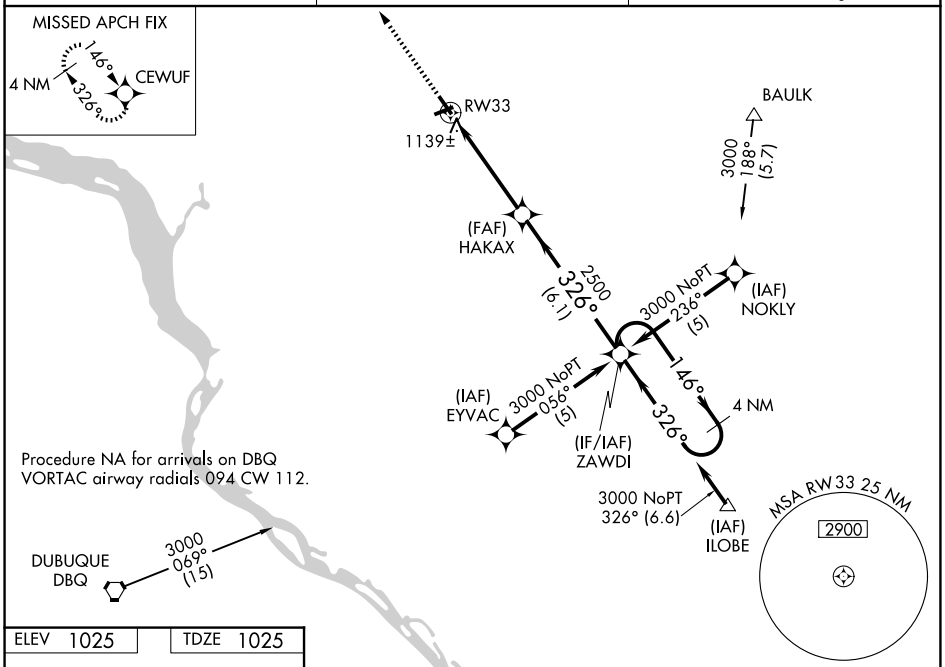

ELEV 1025 TDZE 1025



REIL Rwys 15 and 33 L
MIRL Rwys 7-25 and 15-33 L

3000 CEWUF

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

4 NM Holding Pattern

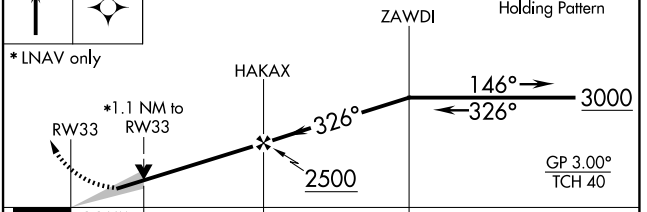

CATEGORY	A	B	C	D
LPV DA	1275-1 250 (300-1)			NA
LNAV/VNAV DA	1441-1½ 416 (500-1½)			NA
LNAV MDA	1400-1 375 (400-1)			NA
CIRCLING	1460-1 435 (500-1)	1600-1 575 (600-1)	1600-1½ 575 (600-1½)	NA

EC-3, 03 SEP 2026 to 01 OCT 2026
EC-3, 03 SEP 2026 to 01 OCT 2026