

APP CRS
060°

Rwy Ldg
TDZE
631

Apt Elev
632

RNAV (GPS) RWY 6

HEBER SPRINGS MUNI/CHARLIE EVANS FLD (HBZ)

RNP APCH.

▼


▲NA

Procedure NA at night. Rwy 6 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when not received, use Batesville altimeter setting and increase all MDAs 80 feet, and increase LNAV visibility Cat C and D ¼ SM. Increase Circling visibility Cat C ¼ SM, Cat D ½ SM.

MISSED APPROACH: Climb to 4000 direct POYOG and hold, continue climb-in hold 4000.

MEMPHIS CENTER
126.85 281.55

UNICOM
122.7 (CTAF) 0

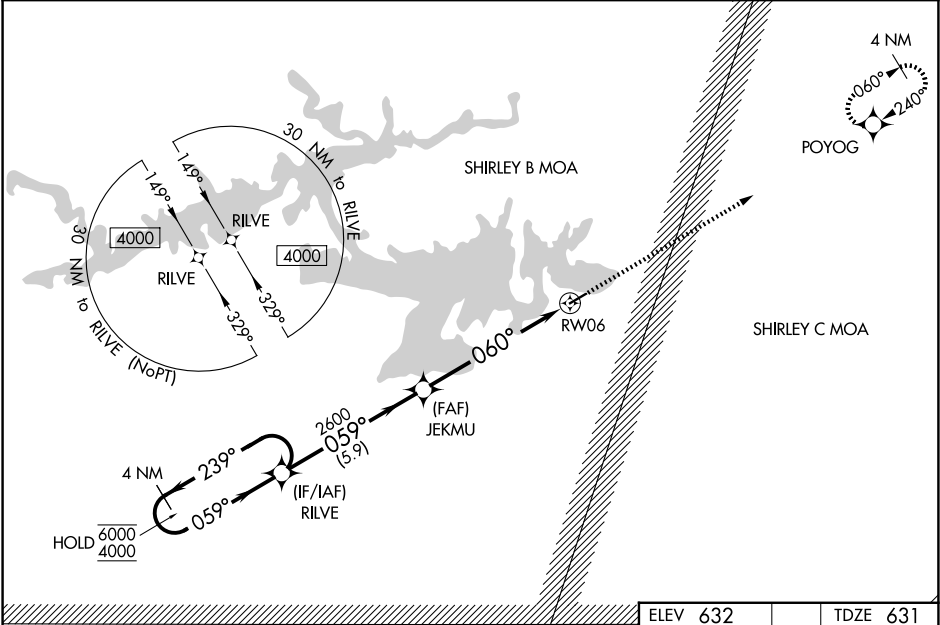

ELEV 632

TDZE 631

4000 POYOG

4 NM Holding Pattern

RILVE

JEKMU

RW06

6000 4000

239°

059°

059°

2600

060°

3.00°

TCH 36

5.9 NM

6.1 NM

060°

0.3° UP

4002 X.75

CATEGORY	A	B	C	D
LNAV MDA	1240-1	609 (700-1)	1240-1¾	609 (700-1¾)
CIRCLING	1240-1 608 (700-1)	1380-1 748 (800-1)	1380-2¼ 748 (800-2¼)	1440-2½ 808 (900-2½)

MIRL Rwy 6-24 0
REIL Rwys 6 and 24 0