WAAS CH 70541 W28A	APP CRS 276°	Rwy Ldg 4201 TDZE 1090 Apt Elev 1090

RNAV (GPS) RWY 28

NEW CASTLE HENRY COUNTY MARLATT FLD (UWL)

RNP APCH - GPS.

Rwy 28 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using AID altimeter setting. When local altimeter setting not received, use AID altimeter setting; increase LPV DA to 1412 feet; increase LNAV/VNAV DA to 1549 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ¼ SM, and Circling visibility Cats C and D ½ SM.

MISSED APPROACH: Climb to 3000 direct HAFHU and hold.

AWOS-3	INDIANAPOLIS APP CON	UNICOM
132.375	135.45 317.8	123.05 (CTAF) L

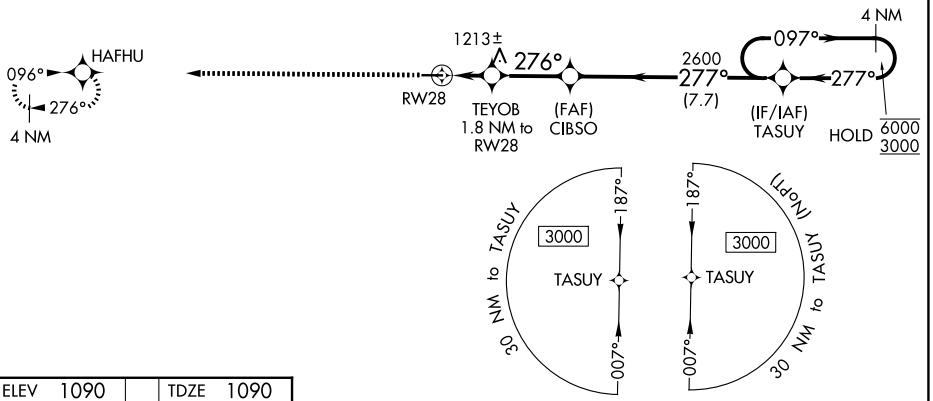

ELEV 1090	TDZE 1090



MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

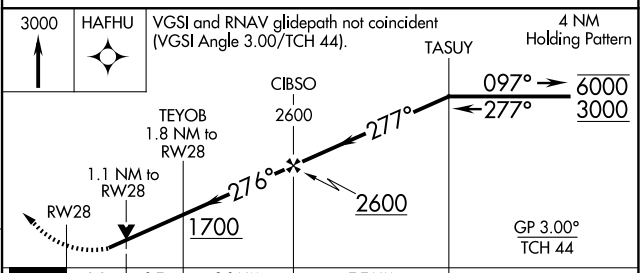

CATEGORY	A	B	C	D
LPV DA	1343-1	253 (300-1)		
LNAV/VNAV DA	1480-1⅛	390 (400-1⅛)		
LNAV MDA	1480-1	390 (400-1)	1480-1⅛	390 (400-1⅛)
CIRCLING	1520-1 430 (500-1)	1540-1 450 (500-1)	1760-1¾ 670 (700-1¾)	1760-2 670 (700-2)

EC-2, 03 SEP 2026 to 01 OCT 2026
EC-2, 03 SEP 2026 to 01 OCT 2026