


WAAS CH 97528 W32A	APP CRS 324°	Rwy Ldg 3305 TDZE 1287 Apt Elev 1288
--	------------------------	---

RNAV (GPS) RWY 32
STAPLES MUNI (SAZ)

- ▼** Circling to Rwy 14 NA at night. Baro-VNAV NA when using Pine River altimeter setting.
▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).
DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pine River altimeter setting and increase all DA 64 feet and all MDA 80 feet and increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat C and Circling Cat C visibility $\frac{1}{4}$ SM. Rwy 32 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 3000 direct
HUDLA and hold.

AWOS-3 118.325	MINNEAPOLIS CENTER 118.05 239.0	GCO 121.725	CTAF 122.9 0
--------------------------	---	-----------------------	------------------------

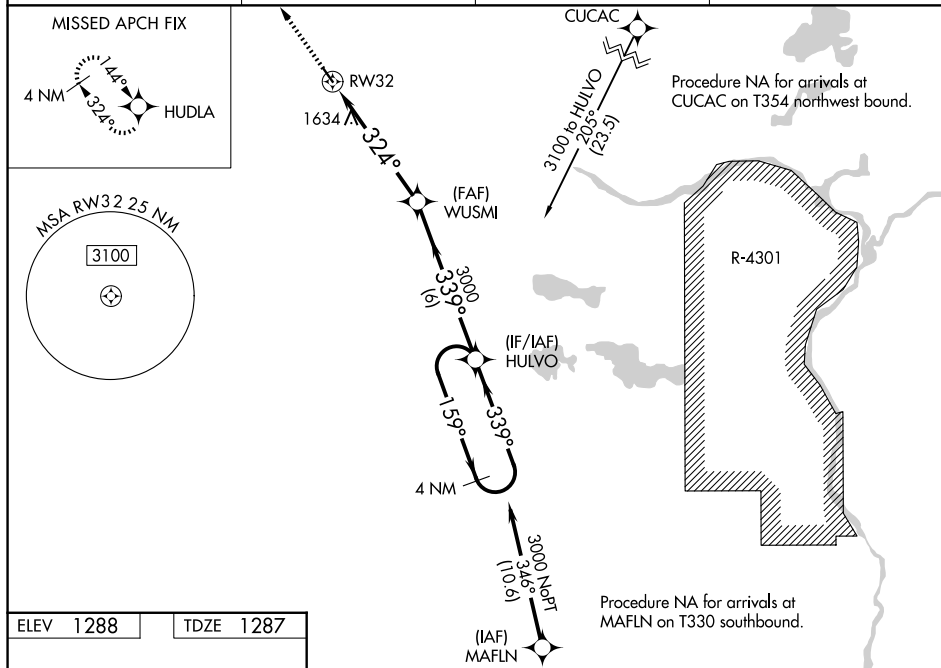

ELEV 1288		TDZE 1287
-----------	--	-----------

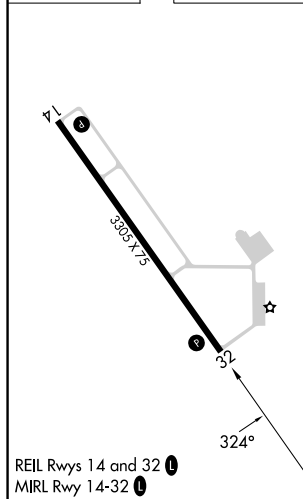


Diagram illustrating the RW32 holding pattern. The pattern is defined by a series of turns around a fix (marked with a cross). The initial turn is 324 degrees, followed by a 339 degree turn, and then a 159 degree turn. The distance between the turns is 5.3 NM. The holding pattern is 4 NM wide. The diagram also shows the VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 27).