


|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>86514</b><br><b>W09A</b> | APP CRS<br><b>095°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>4502</b><br><b>760</b><br><b>763</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 9

PUTNAM COUNTY (OWX)

|           |                                                                                                                                                                                                                                                                                                             |                                                          |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| RNP APCH. | For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.<br>Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Findlay altimeter setting. When local altimeter setting not received, use Findlay altimeter setting and increase all DAs/MDAs 40 feet. | MISSED APPROACH:<br>Climb to 3000 direct CIVRO and hold. |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|

|                            |                                       |                                        |
|----------------------------|---------------------------------------|----------------------------------------|
| AWOS-3PT<br><b>120.525</b> | TOLEDO APP CON<br><b>120.8 317.55</b> | UNICOM<br><b>122.7</b> (CTAF) <b>0</b> |
|----------------------------|---------------------------------------|----------------------------------------|

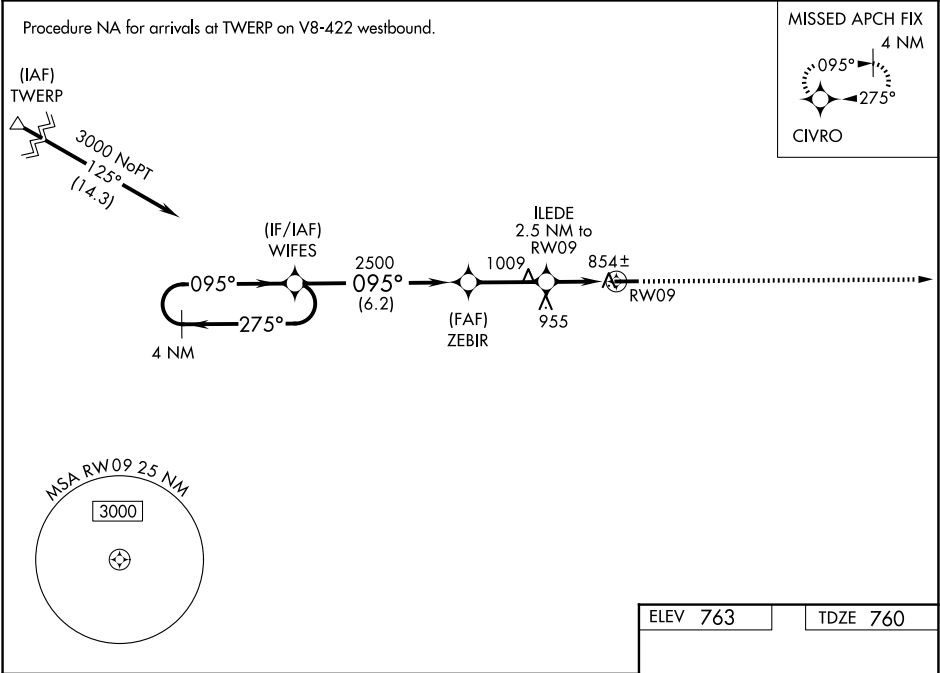

|                      |                    |                    |                      |             |
|----------------------|--------------------|--------------------|----------------------|-------------|
| 4 NM Holding Pattern | WIFES              | ZEBIR              | ILEDE 2.5 NM to RW09 | 3000 CIVRO  |
| 3000                 | 275°               | 095°               | 095°                 | *LNAV only. |
| GP 3.00° TCH 40      | 2500               | *1580              | *1 NM to RW09        | 4502 X 75   |
|                      | 6.2 NM             | 2.8 NM             | 1.5                  | 799±        |
| CATEGORY             | A                  | B                  | C                    | D           |
| LPV DA               | 1048-1             | 288 (300-1)        | NA                   | NA          |
| LNAV/ VNAV DA        | 1147-1 ½           | 387 (400-1 ½)      | NA                   | NA          |
| LNAV MDA             | 1120-1             | 360 (400-1)        | NA                   | NA          |
| CIRCLING             | 1200-1 437 (500-1) | 1220-1 457 (500-1) | NA                   | NA          |

REIL Rwy 9 and 27 **0**

MIRL Rwy 9-27 **0**