



WAAS CH 72739 W21A	APP CRS 204°	Rwy Ldg 4500 TDZE 157 Apt Elev 160
--	------------------------	---


RNAV (GPS) RWY 21

WILSON INDUSTRIAL AIR CENTER (W03)

RNP APCH.	▼ NA Circling Rwy 9, 15, 27, 33 NA at night. Obtain local altimeter setting on CTAF; when not received, use Rocky Mount altimeter setting and increase all MDA 20 feet; increase LP Cats C and D visibility 1⁄8 SM. Rwy 21 helicopter visibility reduction below 3⁄4 SM NA.	MISSED APPROACH: Climb to 1000, then climbing right turn to 2500 direct FEBEL and hold.
-----------	--	---

WASHINGTON CENTER 123.85 279.65	UNICOM 123.0 (CTAF) 0
---	---------------------------------

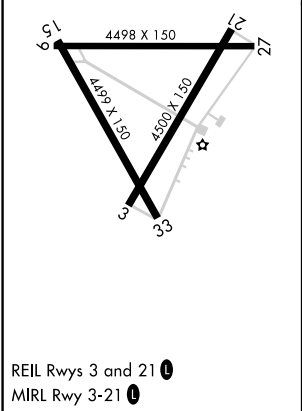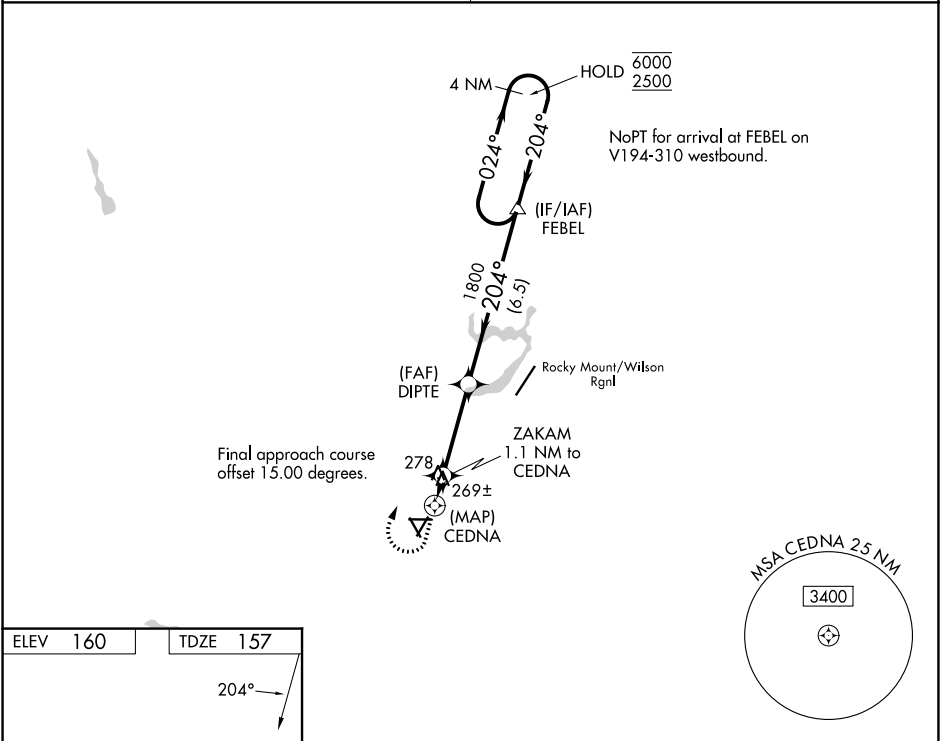

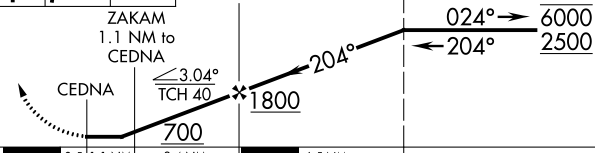1000	2500	FEBEL	4 NM Holding Pattern			
						
						
CATEGORY			A	B	C	D
LP	MDA	520-1 363 (400-1)				
LNAV	MDA	540-1 383 (400-1)		540-1½ 383 (400-1½)		
CIRCLING	660-1 500 (500-1)		780-1¾ 620 (700-1¾)		780-2 620 (700-2)	