


APP CRS	Rwy Ldg	4498
095°	TDZE	161
	Apt Elev	160

RNAV (GPS) RWY 9

WILSON INDUSTRIAL AIR CENTER (W03)

▼ NA DME/DME RNP-0.3 NA. Procedure NA at night. Visibility reduction by helicopters NA. Obtain local altimeter setting on CTAF; when not received use Rocky Mount altimeter setting.	MISSED APPROACH: Climb to 2500 direct ROGCO then left turn via 002° track to FEBEL and hold.
---	---

WASHINGTON CENTER 123.85 279.65	UNICOM 123.0 (CTAF) 0
------------------------------------	--------------------------

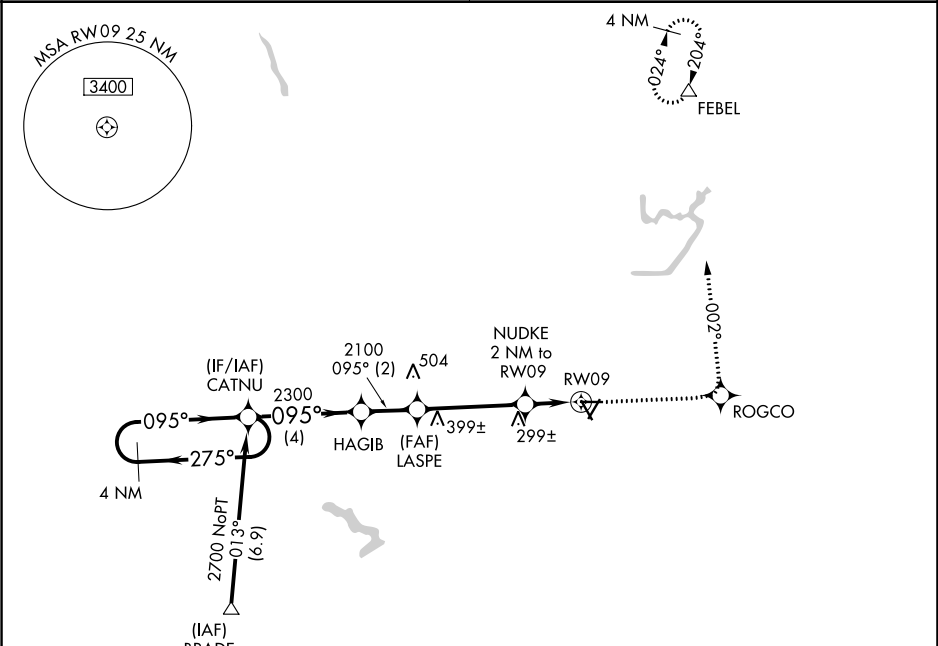

	ELEV 160	TDZE 161
	4 NM Holding Pattern	2500 ROGCO FEBEL
	2700 CATNU	002° tr
	HAGIB LASPE	
	2300 2100	NUDKE 2 NM to RW09
	820	RW09
	4 NM 2 NM 3.9 NM 2 NM	
CATEGORY	A	B
LNAV MDA	560-1	399 (400-1)
CIRCLING	660-1 500 (500-1)	780-1 3/4 620 (700-1 3/4)
	780-2 620 (700-2)	
	ROCKY MOUNT ALTIMETER SETTING MINIMUMS	
LNAV MDA	580-1 419 (500-1)	580-1 1/4 419 (500-1 1/4)
CIRCLING	680-1 520 (600-1)	800-1 3/4 640 (700-1 3/4)
		800-2 640 (700-2)