

WAAS CH 86539 W25A	APP CRS 253°	Rwy Ldg 6501 TDZE 5140 Apt Elev 5176
--	------------------------	---

RNAV (GPS) RWY 25



TANA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 48°C (119°F). Baro-VNAV and VDP NA when using Vernal altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Vernal altimeter setting: increase LPV DA to 5466 and visibility 1/8 SM, LNAV/VNAV DA to 5628 and visibility 1/4 SM; increase all MDAs 80 feet and LNAV visibility Cat C and D 1/8 SM and Circling Cat C visibility 1/4 SM.



MISSED APPROACH: Climb to 5700 then climbing left turn to 10500 direct IGEHU and hold, continue climb-in-hold to 10500.

AWOS-3P 118.975	SALT LAKE CENTER 135.77 257.7	UNICOM 122.8 (CTAF) ①
---------------------------	---	---------------------------------

MISSED APCH FIX

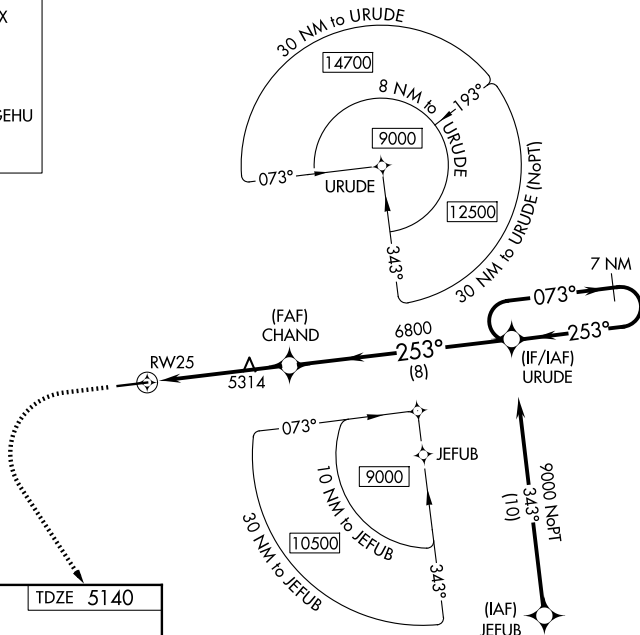

ELEV 5176		TDZE 5140
-----------	--	-----------

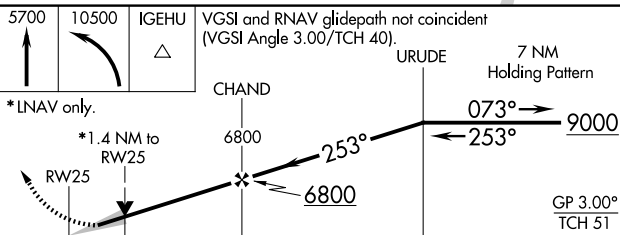

CATEGORY	A	B	C	D
LPV DA	5390-1 250 (300-1)			
INAV/ VNAV DA	5552-1½ 412 (400-1½)			
INAV MDA	5580-1 440 (500-1)		5580-1¼ 440 (500-1¼)	
CIRCLING	5740-1 564 (600-1)	5900-1 724 (800-1)	6020-2½ 844 (900-2½)	6340-3 1164 (1200-3)