

WAAS CH 45722 W11A	APP CRS 110°	Rwy Ldg TDZE 854 Apt Elev 871
--	------------------------	---

RNAV (GPS) RWY 11

LEBANON SPRINGFIELD/GEORGE HOERTER FLD (6I2)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility ¼ mile and LNAV Cats C/D ⅓ mile. Baro-VNAV NA when using Danville altimeter setting.

MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in-hold to 4000.

AWOS-3P 119.725	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

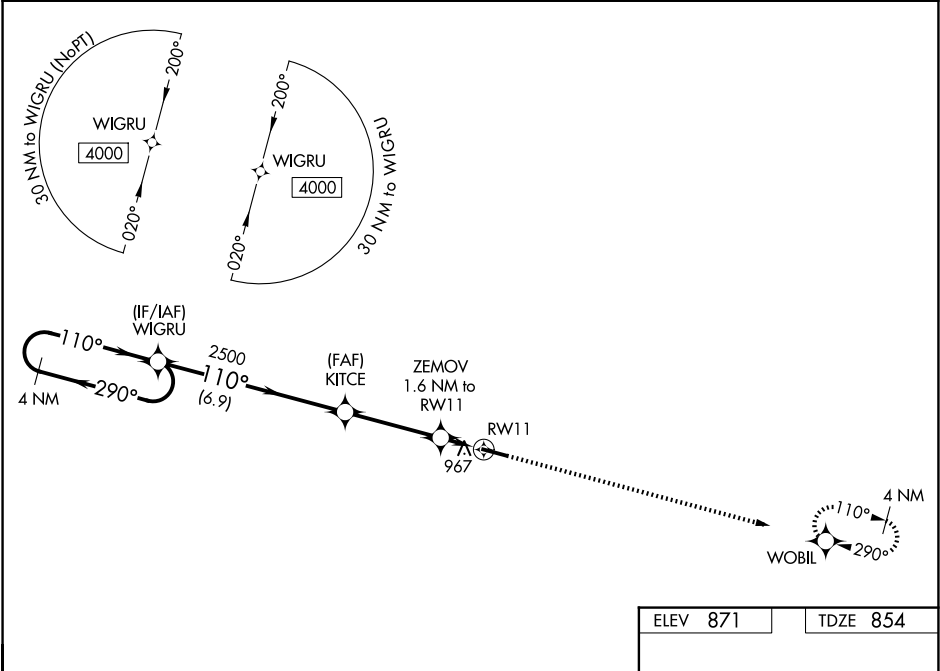

4 NM Holding Pattern WIGRU					4000	WOBIL
GP 3.00° TCH 36					*LNAV only	
KITCE 2500					ZEMOV 1.6 NM to RW11	
2500					RW11	
6.9 NM					1.6 NM	
CATEGORY					A	
LPV DA					1104-1 250 (300-1)	
LNAV/VNAV DA					1159-1⅓ 305 (300-1⅓)	
LNAV MDA					1220-1 366 (400-1)	
CIRCLING					1320-1 449 (500-1) 1340-1 469 (500-1) 1360-1½ 489 (500-1½) 1500-2 629 (700-2)	

ELEV 871 TDZE 854

110°

1.0% UP →

5001 X 75

MRL Rwy 11-29 0 REIL Rws 11 and 29 0

SE-1, 03 SEP 2026 to 01 OCT 2026

SE-1, 03 SEP 2026 to 01 OCT 2026