WAAS	APP CRS		
CH **82600**	**109°**	Rwy Ldg	**6000**
W11A		TDZE	**310**
		Apt Elev	**310**

RNAV (GPS) RWY 11

SOUTH ALABAMA RGNL AT BILL BENTON FLD (79J)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Cairns AAF (Fort Rucker) altimeter setting and increase all DA 82 feet, all MDA 100 feet. Increase all LPV and LNAV/VNAV visibilities ⅜ mile all Cats, LNAV and Circling Cats C and D ¼ mile. Baro-VNAV and VDP NA when using Cairns AAF (Fort Rucker) altimeter setting.

MISSED APPROACH: Climb to 2000 direct ALANE and hold.

ASOS	CAIRNS APP CON ★	UNICOM
134.875	**133.45 239.275**	**123.05** (CTAF) L

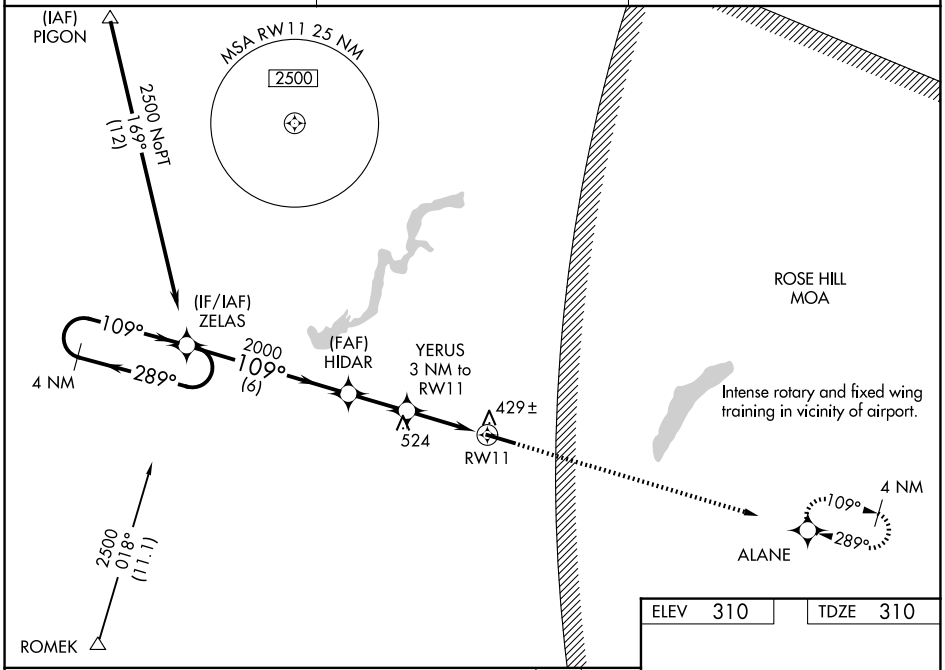

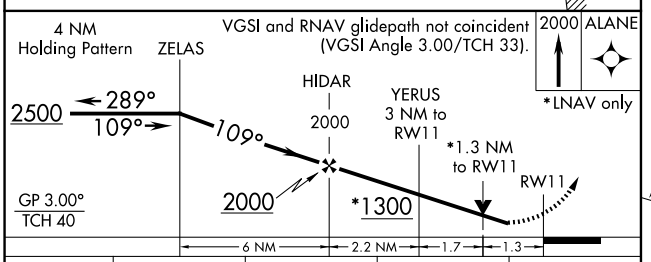

CATEGORY	A	B	C	D
LPV DA	615-1 305 (400-1)			
LNAV/VNAV DA	655-1⅛ 345 (400-1⅛)			
LNAV MDA	760-1 450 (500-1)		760-1⅜ 450 (500-1⅜)	
CIRCLING	820-1 510 (600-1)		860-1½ 550 (600-1½)	940-2 630 (700-2)

ELEV 310 TDZE 310



MIRL Rwy 11-29 L
REIL Rwys 11 and 29

SE-4, 03 SEP 2026 to 01 OCT 2026
SE-4, 03 SEP 2026 to 01 OCT 2026